

CM12-4P-5MK

M12 female 90° A-cod. with cable



PVC 4x0.25 bk 5m

SEN
NBK SOR

Made in Italy




1	brown (+)
2	white (N/C)
4	black (N/O)
3	blue (-)

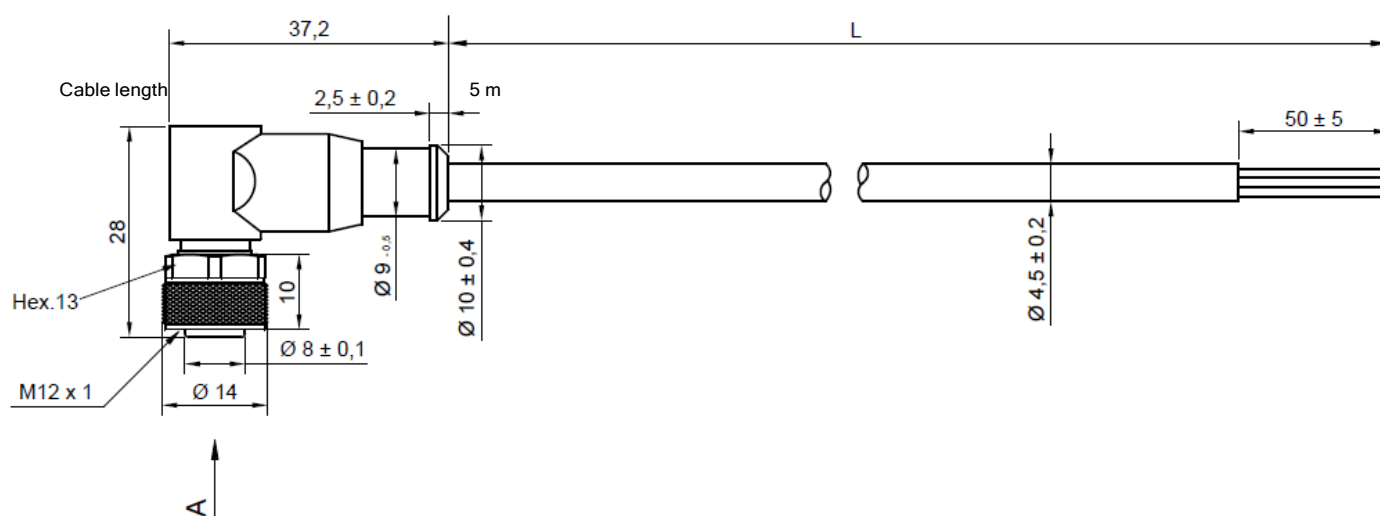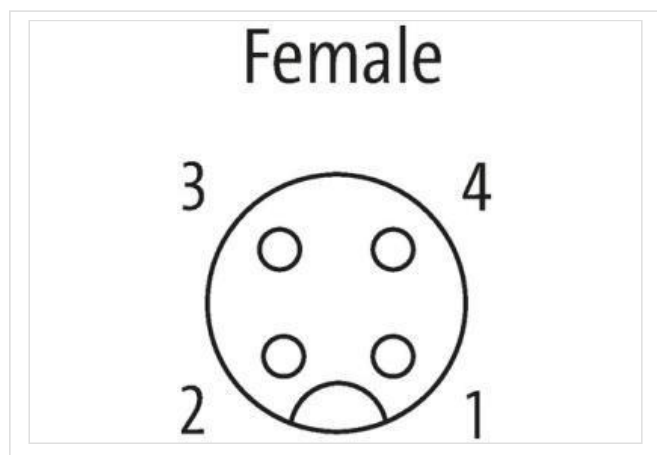

Technical Data

Standard:	IEC 61076-2-101
Rated Voltage:	250 V
Rated Current:	4 A
Insulation:	$\geq 100\text{M}\Omega$ (IEC60512)
Contact resistance:	$\leq 10\text{m}\Omega$
Fixing screw torque:	min 0,3; max 0,5 N/m
Temperature range:	-25°C...+80°C
Housing Color:	Black
Protection Class:	IP67
Contact Material:	CuSn gold plated
Mounting:	Anti-vibration system
Overmoulding material:	TPU (Polyurethane)
Coupling nut material:	CuZn nikel plated
O-Ring Material:	FKM (Viton)
Contact holder material:	PA +GF
Conductors Material:	Electrolytic bare copper
Composition:	4 x 0,25
Stranding:	32 x 0,10
Insulation Material:	PVC
Jacket Material:	PVC IEC 60332-3-24 Cat.C
Jacket Color:	Black (RAL 9005)

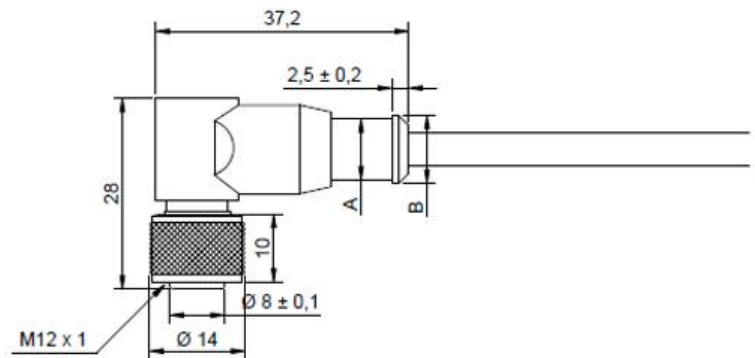

Vista frontale Face view	Chiave/poli Coding/poles	Sistema di bloccaggio Locking system	Collegamenti Connections	Tensione Voltage (V)	Corrente max Max current (A)	Caratteristiche Features	Colore testina Housing color
	A/2-4	Ghiera con antisvitamento Ring nut with anti-vibration system	1) Marrone / Brown 2) Bianco / White 3) Blu / Blue 4) Nero / Black	250	4	Senza elettronica Without electronics	Nero Black
				30	4	Con elettronica LED With LED electronics	Trasparente Colorless
						1) Marrone / Brown 4) Nero / Black 3) Blu / Blue 2) Bianco / White PNP	
						3) Blu / Blue 4) Nero / Black 1) Marrone / Brown 2) Bianco / White NPN	
						1) Marrone / Brown 4) Nero / Black 3) Blu / Blue 2) Bianco / White DECOUT	
						1) Marrone / Brown 2) Bianco / White 4) Nero / Black 3) Blu / Blue PNP 3 LED	