

Technical Data



CM8-4P-10MK

M8 female 90° A-cod. with cable



PVC 4x0.25 bk 10m

**SEN
NBK** **SOR**

Made in Italy

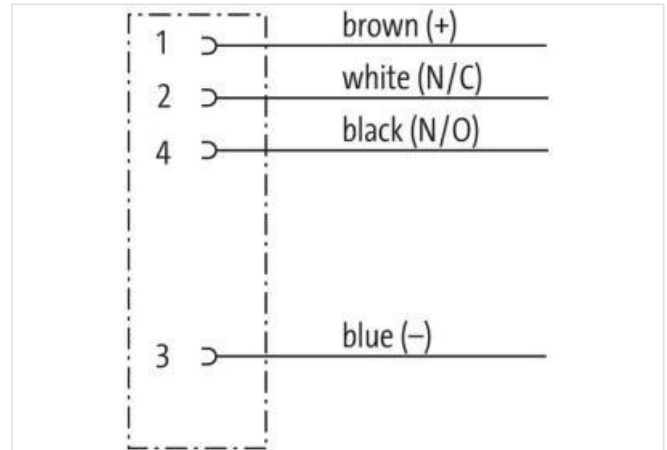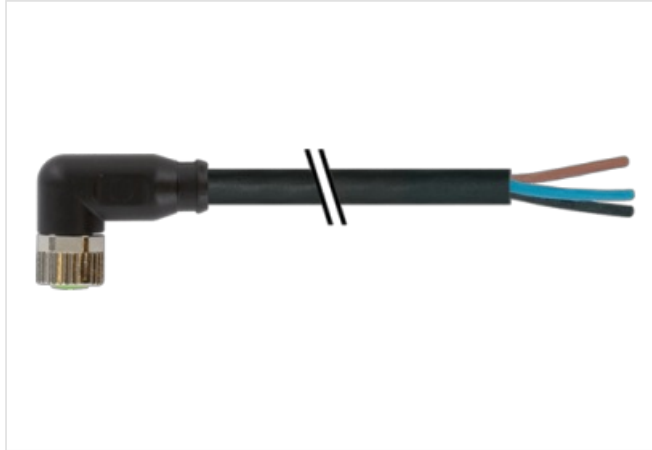



Female

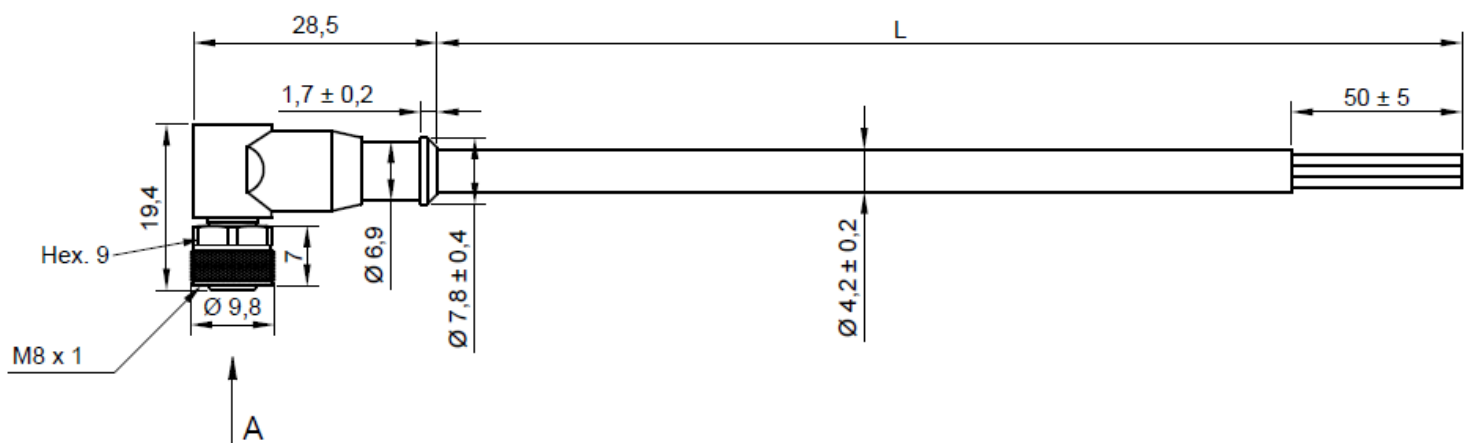

Technical Data

Standard:	IEC 61076-2-104
Rated Voltage:	60 V
Rated Current:	3 A
Insulation:	≥100MΩ (IEC60512)
Contact resistance:	≤10mΩ
Fixing screw torque:	min 0,3; max 0,5 N/m
Temperature range:	-25°C...+80°C
Housing Color:	Black
Protection Class:	IP67
Contact Material:	CuSn gold plated
Mounting:	Anti-vibration system
Overmoulding material:	TPU (Polyurethane)
Coupling nut material:	CuZn nikel plated
O-Ring Material:	FKM (Viton)
Contact holder material:	PA +GF
Conductors Material:	Electrolytic bare copper
Composition:	4 x 0,25
Stranding:	32 x 0,10
Insulation Material:	PVC
Jacket Material:	PVC IEC 60332-3-24 Cat.C
Jacket Color:	Black (RAL 9005)

CM8-4P-10MK

Vista frontale <i>Face view</i>	Chiave/poli <i>Coding/poles</i>	Sistema di bloccaggio <i>Locking system</i>	Collegamenti <i>Connections</i>	Tensione <i>Voltage (V)</i>	Corrente max <i>Max current (A)</i>	Caratteristiche <i>Features</i>	Colore testina <i>Housing color</i>
	A/4	Ghiera con antisvitamento <i>Ring nut with anti-vibration system</i>	1) Marrone / Brown 2) Bianco / White 3) Blu / Blue 4) Nero / Black	60	3	Senza elettronica <i>Without electronics</i>	Nero <i>Black</i>
				30	3	Con elettronica LED <i>With LED electronics</i> 1) Marrone / Brown 4) Nero / Black 3) Blu / Blue 2) Bianco / White  PNP 3) Blu / Blue 4) Nero / Black 1) Marrone / Brown 2) Bianco / White  NPN	Trasparente <i>Colorless</i>