

Technical Data

CM8-4P-10MP

M8 female 0° A-cod. with cable

PVC 4x0.25 bk 10m



SEN
NBK **SOR**

Made in Italy



1	↷	brown (+)
2	↷	white (N/C)
4	↷	black (N/O)
3	↷	blue (-)



Female

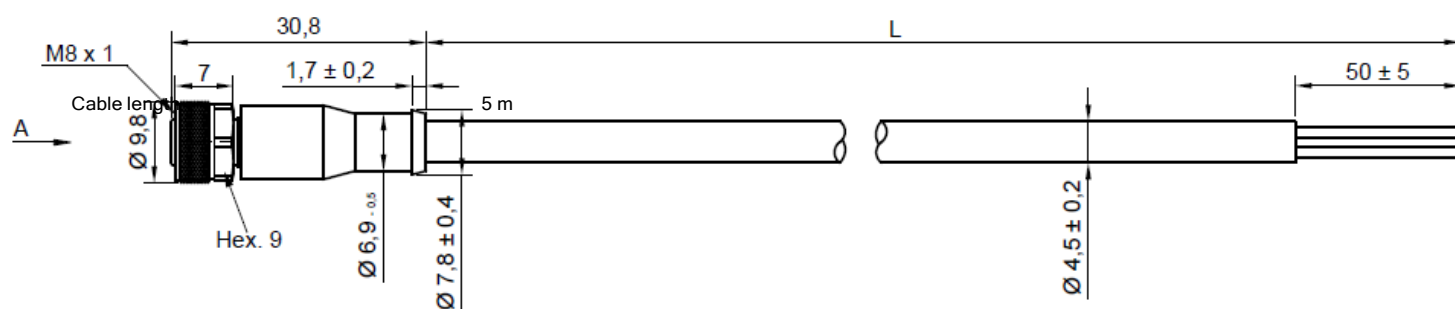

Technical Data

Standard:	IEC 61076-2-104
Rated Voltage:	60 V
Rated Current:	3 A
Insulation:	≥100MΩ (IEC60512)
Contact resistance:	≤10mΩ
Fixing screw torque:	min 0,3; max 0,5 N/m
Temperature range:	-25°C...+80°C
Housing Color:	Black
Protection Class:	IP67
Contact Material:	CuSn gold plated
Mounting:	Anti-vibration system
Overmoulding material:	TPU (Polyurethane)
Coupling nut material:	CuZn nikel plated
O-Ring Material:	FKM (Viton)
Contact holder material:	PA +GF
Conductors Material:	Electrolytic bare copper
Composition:	4 x 0,25
Stranding:	32 x 0,10
Insulation Material:	PVC
Jacket Material:	PVC IEC 60332-3-24 Cat.C
Jacket Color:	Black (RAL 9005)

CM8-4P-10MP

Vista frontale Face view	Chiave/poli Coding/poles	Sistema di bloccaggio Locking system	Collegamenti Connections	Tensione Voltage (V)	Corrente max Max current (A)	Caratteristiche Features	Colore testina Housing color
	A/4	Ghiera con antisvitamento Ring nut with anti-vibration system	1) Marrone / Brown 2) Bianco / White 3) Blu / Blue 4) Nero / Black	60	3	Senza elettronica Without electronics	Nero Black
				30	3	Con elettronica LED With LED electronics 1) Marrone / Brown 4) Nero / Black 3) Blu / Blue 2) Bianco / White  PNP 3) Blu / Blue 4) Nero / Black 1) Marrone / Brown 2) Bianco / White  NPN	Trasparente Colorless