

Technical Data

CM12-5P-5MPU

M12 female 0° A-cod. with cable



PUR 5x0.25 bk 5m

SEN
NBK **SOR**

Made in Italy




- 1) Marrone / Brown
- 2) Bianco / White
- 3) Blu / Blue
- 4) Nero / Black
- 5) Grigio / Grey

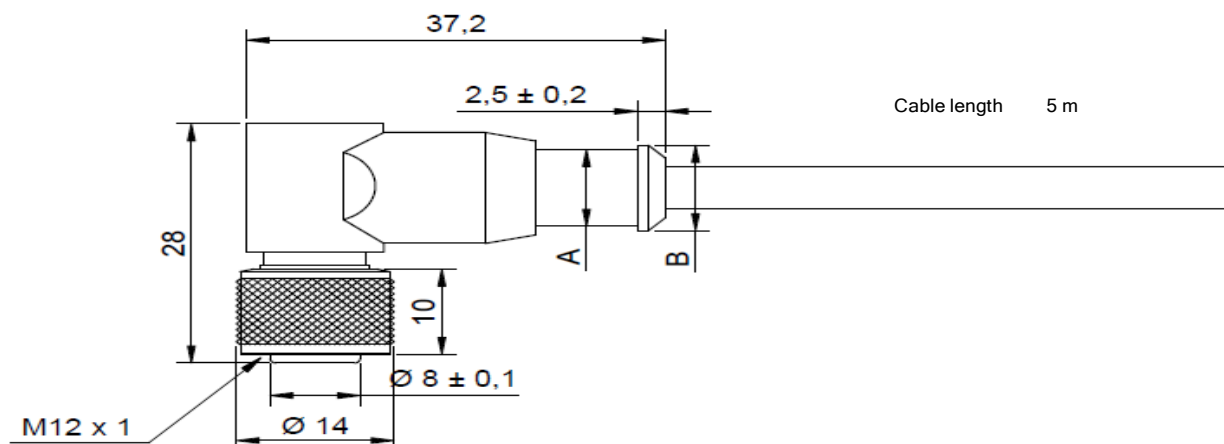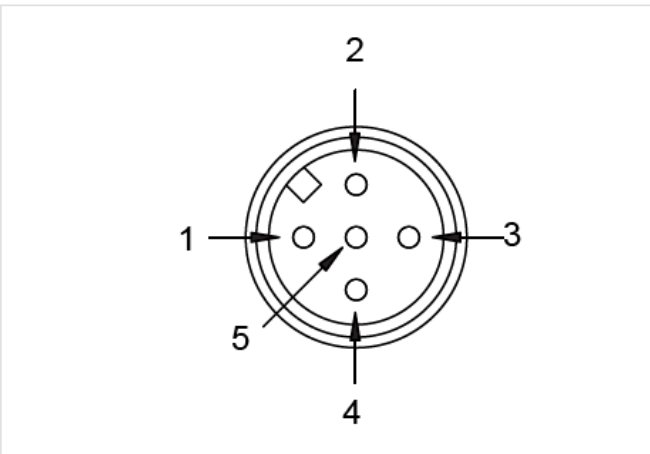

A= $\varnothing 9$ - B= $\varnothing 10$ with $\varnothing$ cable $\leq 5,8$
A= $\varnothing 10,3$ - B= $\varnothing 12$ with $\varnothing$ cable $> 5,8$

Technical Data

Standard:	IEC 61076-2-101
Rated Voltage:	60 V
Rated Current:	4 A
Insulation:	≥100MΩ (IEC60512)
Contact resistance:	≤10mΩ
Fixing screw torque:	min 0,3; max 0,5 N/m
Temperature range:	-25°C...+80°C
Housing Color:	Black
Protection Class:	IP67
Contact Material:	CuSn gold plated
Mounting:	Anti-vibration system
Overmoulding material:	TPU (Polyurethane)
Coupling nut material:	CuZn nikel plated
O-Ring Material:	FKM (Viton)
Contact holder material:	PA +GF
Conductors Material:	Electrolytic bare copper
Composition:	5 x 0,25
Stranding:	32 x 0,10
Insulation Material:	PVC
Jacket Material:	PUR
Jacket Color:	Black (RAL 9005)

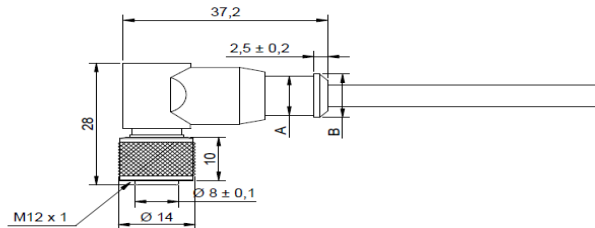

A=Ø9 - B=Ø10 with Ø cable ≤5,8
A=Ø10,3 - B=Ø12 with Ø cable >5,8

Вид спереду Face view	Ключ/полюса Coding/poles	Система фіксації Locking system	Комунікація Connections	Напруга Voltage (V)	Максимальний струм Max current (A)	Особливості Features	Колір головки Housing color
	A/5	Фіксуюче кільце з захистом від викручування Ring nut with anti-vibration system	1 → Marrone / Brown 2 → Bianco / White 3 → Blu / Blue 4 → Nero / Black 5 → Grigio / Grey	60	4	Без електронних пристроїв Without electronics	Чорний Black