



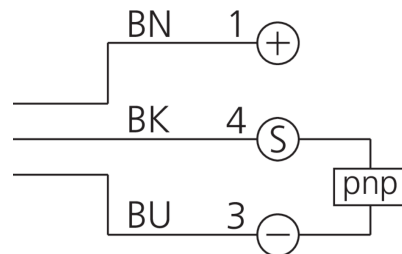

206614
DCC 08 M 2.5 POLK
Inductive proximity sensor

- Highly flexible cable
- Integrated amplifier
- Short-circuit protection
- Starting pulse suppression
- LED

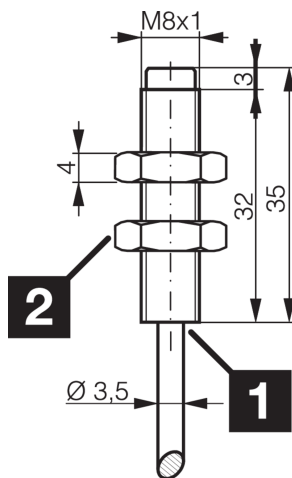

1) LED

2) Width over flats 13 mm

BK: black

BN: brown

BU: blue

Function



Technical data (typ.)

+20°C, 24 V DC

Electrical features

Service voltage	10 ... 30 V DC
Internal power consumption	< 10 mA
Insulation voltage endurance	500 V

Mechanical features

Installation type	non-flush
Thread	M8 x 1
Housing length	35 mm
Housing material	Stainless steel
Material of cable	PVC

Certifications, approvals

Protection class	III, operation on protective low voltage
------------------	--

General features

Operating principle	inductive
Evaluation	digital
Design	Thread
Characteristics	increased operating distance
Product series	INE Industrial



206614
DCC 08 M 2.5 POLK
Inductive proximity sensor

Technical data (typ.)		+20°C, 24 V DC
Functional scope		
Scope of delivery	Sensor, 2 x M8 nuts	
Output, input, interface		
Switching output	pnp, 200 mA, NC	
Voltage drop (max.)	2.4 V	
Detection range, measuring range, tolerance limits		
Switching distance (SN)	2.5 mm	
Standardized measuring plate	8 x 8 x 1 mm	
Switching hysteresis (max.)	< 5 %	
Time behavior		
Switching frequency	2000 Hz	
Ambient conditions		
Ambient temperature during operation	-25 ... +70 °C	
Protection type	IP 67	
Electrical connection		
Connection	Cable, 2.0 m (flying leads)	
More information / accessories		https://www.di-soric.com/206614