


PRODUCT DESCRIPTION:

AP_T51

PRODUCT CODE:

AP5T51Z11


DYNAMIC 3D VIEW:

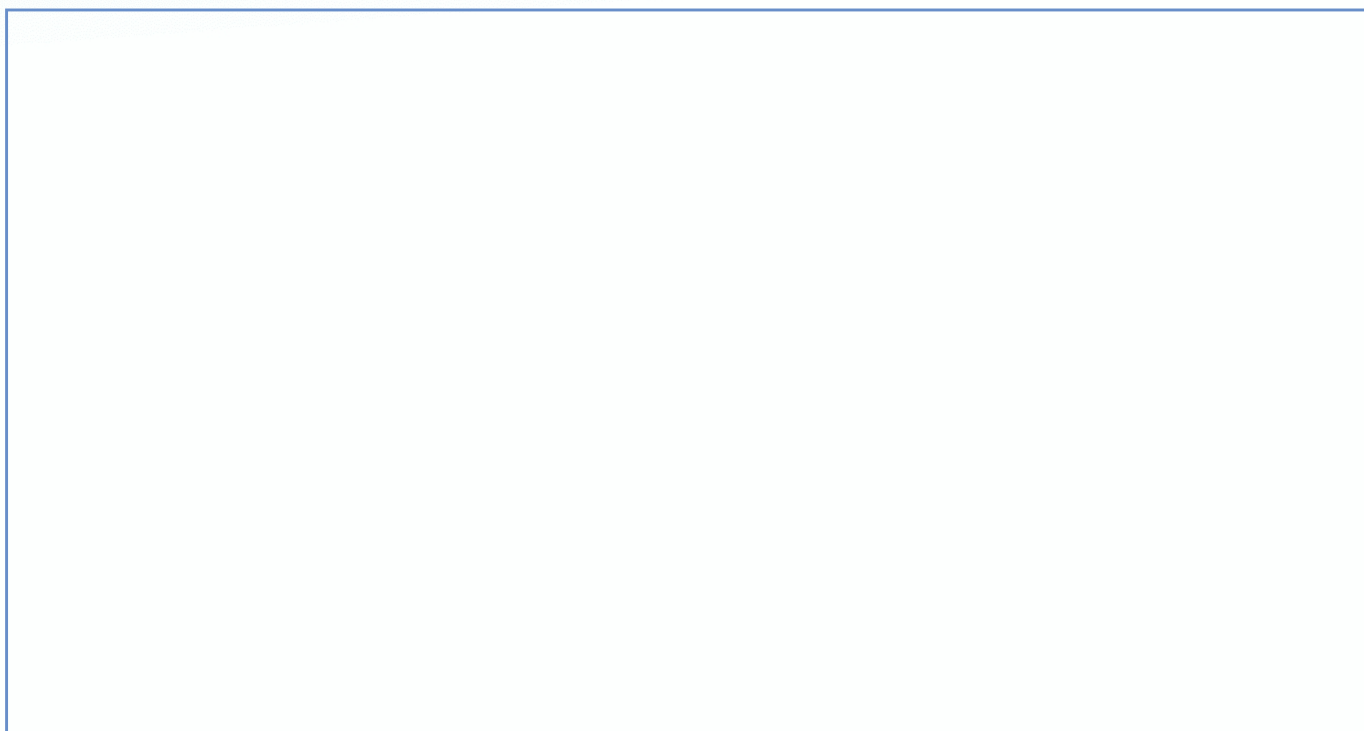

STATIC 3D VIEW:



TECHNICAL VIEW:

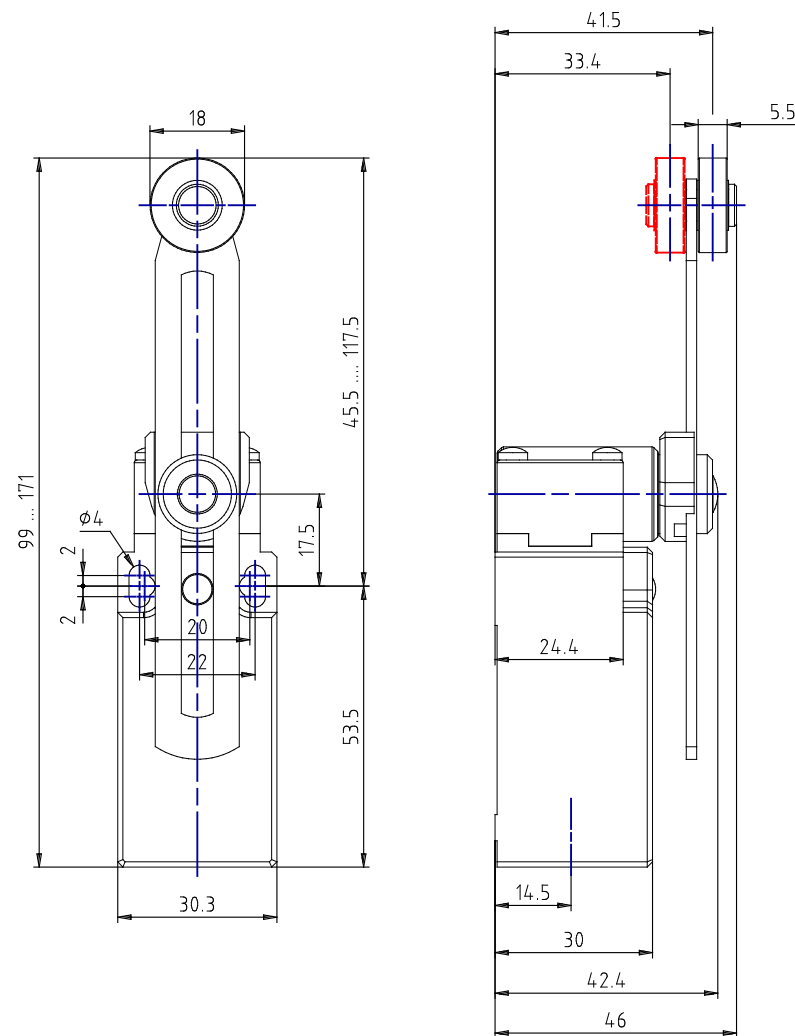

Z11	13	21	0	17°	31°	47°	74°
21-22							
13-14							
21-22							
13-14							

DETAILS:

Part Number	AP5T51Z11
Casing Material	Reinforced thermoplastic
Width [mm]	30
Electrical connections	One cable inlet for M20x1.5 cable gland
IP Degree of Protection	IP65
Actuating Head	Adjustable lever with nylon roller (ø 18mm)
Head Material	Thermoplastic head
Microswitch	Snap action contacts (1NO + 1NC)
Approvals	IMQ - cULus - CCC - CSA - EAC
Reference Directives	LVD - 2014/35/EU
Reference Standards	IEC 60947-5-1 / EN 60947-5-1
Operating Temperatures [°C]	-25°C ... +70°C
Stock Temperatures [°C]	-30°C ... +80°C
Protection against electric shocks [Classe (secondo IEC 60536)]	Class II - Double insulation
Rated Insulating Voltage Ui [V]	500
Pollution Degree	3
Contact rating according to UL50	A600 - Q600
Rated Impulsive Voltage Uimp [kV]	6
Conventional thermal current in free air Ith [A (θ	10
Short circuit protection [A (Ue	10
Rated Operational Current Ie - AC-15 (50-60 Hz) [Secondo IEC 60947-5-1]	24V - 10A / 120V - 6A / 400V - 4A
DC-13 operating currents [Secondo IEC 60947-5-1]	24V - 6A / 125V - 0.55A / 250V - 0.4A
Switching Frequency [Cicli/ora]	3600
Resistance Between Contacts [mΩ]	25
Connecting Terminals	M3.5 screw with cable clamp (+,-) pozidriv 2
Connecting Cables Dimensions [mm²]	0.75 ... 2.5
Protective Conductor Terminal	/
Marking Terminals	According to IEC 60947-5-1
Mechanical Durability [Milioni di manovre]	10
B10d [Milioni di manovre]	20

PRODUCT DRAWING RELEASE:

Datasheet creation date: 08/02/2023 10:57

Last Modification (geometry): 21/12/2020 13:44



tel. +39 039 9906408
+39 039 9903468
fax +39 039 9906203



Via Novarino 9/L
23899 Robbiate (LC)
ITALY



www.comepi.it
comepi@comepi.it
tecnico@comepi.it