

RMM 11/24 DC OUTPUT RELAY

IN: 24 VDC - OUT: 250 VAC/DC / 5 A

Art.No.: 516090

Weight: 0.03

Country of origin: CZ

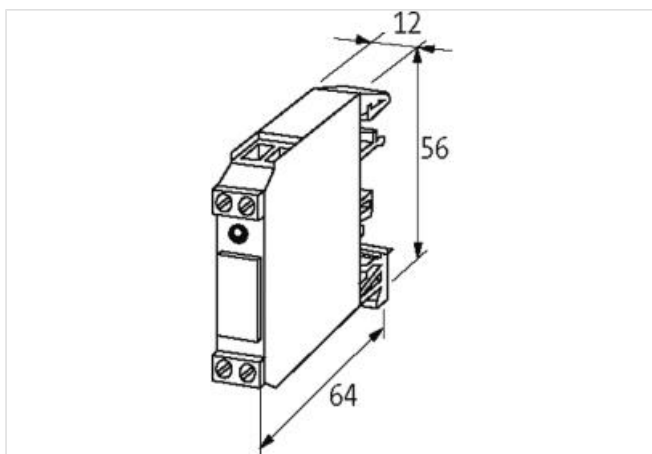
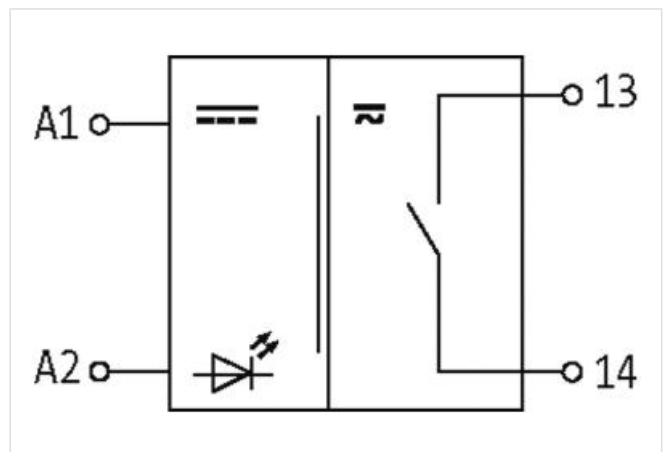
Model designation: RMM 11/24 DC

1 relay; 1 NO contact

5 A

24 V AC/DC

Screw terminals

[Link to Product](#)**Illustration**

Product may differ from Image

Commercial data

ECLASS-6.0	27371601
ECLASS-6.1	27371601
ECLASS-7.0	27371601
ECLASS-8.0	27371601
ECLASS-9.0	27371601
ECLASS-10.1	27371601
ECLASS-11.1	27371601

ECLASS-12.0	27371601
ETIM-5.0	EC001437
customs tariff number	85364900
customs tariff number	85364900
GTIN	4048879024822
GTIN	4048879024822
Packaging unit	1
Packaging unit	1

Electrical data | Supply

Power frequency	50 ... 60 Hz
-----------------	--------------

Electrical data | Input

Input voltage DC	24 V
Input voltage DC min.	19,2 V
Input voltage DC max.	30 V
Input current	15 mA

Electrical data | Output

Utilization category AC-15 (EN IEC 60947-5-1)	3 A @ 24 V, 3 A @ 110 V, 3 A @ 230 V
Utilization category DC-13 (EN IEC 60947-5-1)	1,5 A @ 24 V, 0,3 A @ 110 V, 0,15 A @ 230 V
Power rating AC max.	1250 VA
Power rating DC max.	240 W
Switching voltage AC max.	250 V
Switching voltage DC max.	250 V
Switching current DC	100 mA
Switching current max.	5 A
Switching capacity AC-12 (EN IEC 60947-5-1)	5 A (24/110/230 V AC)

Diagnostics

Status indication LED	red
-----------------------	-----

Device protection

Condition lifetime	load-dependent
--------------------	----------------

Device protection | Electrical

Rated surge voltage	4 kV
Electrical lifetime	20000000 Cycles

Device protection | Mechanical

Mechanical endurance	20000000 Cycles
----------------------	-----------------

Mechanical data

Drop-out time max.	15 ms
Response time max.	20 ms
Bounce time max.	2 ms

Mechanical data | Material data

Material contact	Ag Ni
------------------	-------

Mechanical data | Mounting data

Mounting method	geschnappt
Suitable for mounting type	Mounting rail TH35, G32, (EN 60715)

Environmental characteristics | Climatic

Operating temperature min.	-25 °C
Operating temperature max.	60 °C
Storage temperature min.	-40 °C
Storage temperature max.	80 °C

Connection type 2

Connection	Screw terminals SK
Family construction form	terminal
Gender	female
No. of poles	2
PIN 1	13
PIN 2	14
Connection	Screw terminals SK
Family construction form	terminal
Gender	female
No. of poles	2
PIN 1	- A 1
PIN 2	+ A 2