

A3 Hood, IP67


Single locking lever, top entry M20

Art.No.: 70MH-GTANL-A01B100
Weight: 0.063
Country of origin: CZ
Model designation: MSMH-GT-A03N-LVBO-geradeM20-IP67-SDN

A3
Hood
Single locking lever
IP67
Technical data will be only guaranteed with Murrelektronik components.

Link to Product

Illustration

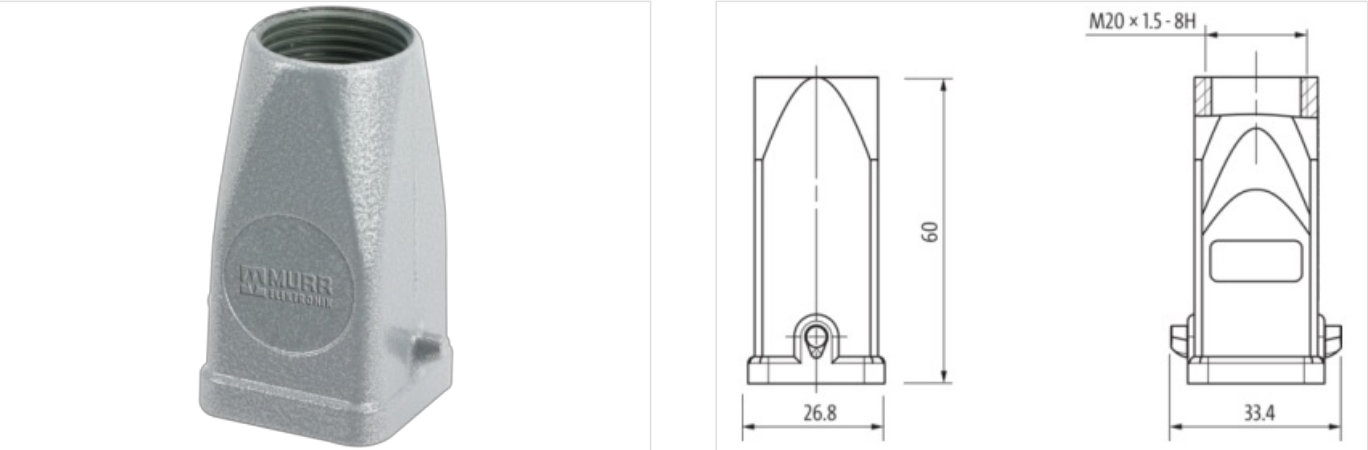

Product may differ from Image

Commercial data	
URL Webshop	https://shop.murrelektronik.com/70MH-GTANL-A01B100
GTIN	4048879643023
ECLASS-6.0	27143424
ECLASS-6.1	27261203
ECLASS-7.0	27440202
ECLASS-7.1	27440202
ECLASS-8.0	27440202
ECLASS-8.1	27440202
ECLASS-9.0	27440202
ECLASS-9.1	27440202
ECLASS-10.0.1	27440202
ECLASS-10.1	27440202
ECLASS-11.0	27440202
ECLASS-11.1	27440202
ECLASS-12.0	27440202
ECLASS-13.0	27440202
ECLASS-14.0	27440202
ETIM-5.0	EC000437
ETIM-6.0	EC000437
ETIM-7.0	EC000437
ETIM-8.0	EC000437
EAN	4048879643023

Installation	
Cable outlet	straight
Installation Connection	
Mounting set	M20
Mating cycles min.	500
Device protection Electrical	
Degree of protection (EN IEC 60529)	IP67
Additional condition protection degree	locked, with screw connection, inserted
Mechanical data	
Housing type	Hood
Mechanical data Material data	
Material housing	Zinc die-casting
Coating housing	powder-coated
Locking material	Steel
Coating locking	galvanized
Mechanical data Mounting data	
Height	60 mm
Width	26.8 mm
Depth	33.4 mm
Locking techniques	Single locking lever
Size	A3
Environmental characteristics Climatic	
Operating temperature min.	-40 °C
Operating temperature max.	100 °C
Climatic category (EN IEC 60068-1)	40/100/21