

A3 Bulkhead mounted h., angled, IP65

Single locking lever m.

Art.No.: 70MH-GAAAL-B000000

Weight: 0.19

Country of origin: CZ

Model designation: MSMH-GA-A03A-LVMB-IP65-SDN

A3

Bulkhead mounted housing

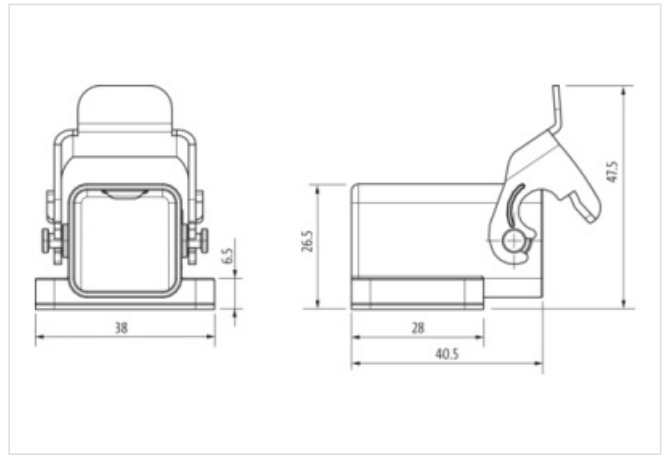
Single locking lever

IP65

Technical data will be only guaranteed with Murrelektronik components.

[Link to Product](#)**Illustration**

Product may differ from Image

**Header**

Material short text MSMH-GA-A03A-LVMB-IP65-SDN

Commercial data

URL Webshop	https://shop.murrelektronik.com/70MH-GAAAL-B000000
GTIN	4048879643009
ECLASS-6.0	27143424
ECLASS-6.1	27261203
ECLASS-7.0	27440202
ECLASS-7.1	27440202
ECLASS-8.0	27440202
ECLASS-8.1	27440202
ECLASS-9.0	27440202
ECLASS-9.1	27440202
ECLASS-10.0.1	27440202
ECLASS-10.1	27440202
ECLASS-11.0	27440202
ECLASS-11.1	27440202
ECLASS-12.0	27440202
ECLASS-13.0	27440202
ECLASS-14.0	27440202
ETIM-5.0	EC000437
ETIM-6.0	EC000437

The information in this Product-PDF has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2025-11-14

Murrelektronik GmbH | Grabenstraße 29 | 71570 Oppenweiler | Fon +49 (71 91) 47-0 | Fax +49 (71 91) 47-491000 | shop@murrelektronik.com | shop.murrelektronik.com

ETIM-7.0	EC000437
ETIM-8.0	EC000437
customs tariff number	85389099
EAN	4048879643009
Packaging unit	1

Installation | Connection

Mating cycles min.	500
--------------------	-----

Device protection | Electrical

Degree of protection (EN IEC 60529)	IP65
Additional condition protection degree	locked, with screw connection, inserted

Mechanical data

Housing type	Bulkhead mounted housing
--------------	--------------------------

Mechanical data | Material data

Material housing	Zinc die-casting
Coating housing	powder-coated
Locking material	Steel
Coating locking	galvanized
Material gasket	NBR

Mechanical data | Mounting data

Height	47.5 mm
Width	40.5 mm
Depth	38 mm
Locking techniques	Single locking lever
Size	A3

Environmental characteristics | Climatic

Operating temperature min.	-40 °C
Operating temperature max.	100 °C
Climatic category (EN IEC 60068-1)	40/100/21