

MIRO TR 24VDC SK OPTO-COUPLER MODULE

IN: 53 VDC - OUT: 48 VDC / 0,5 A - 1 C/O contact

Art.No.: 52510

Weight: 0,030 kg

Country of origin: CZ

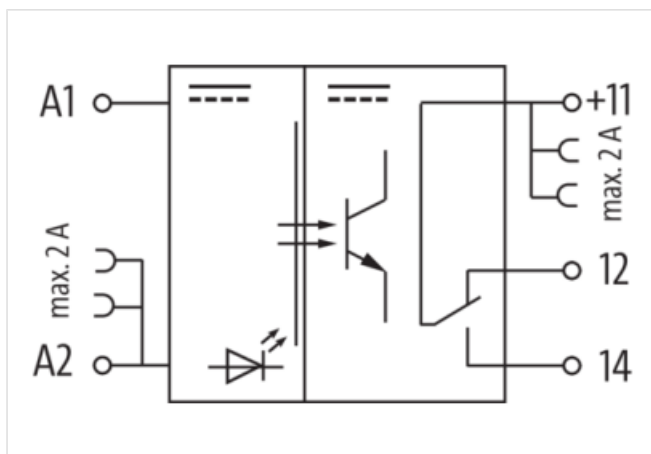
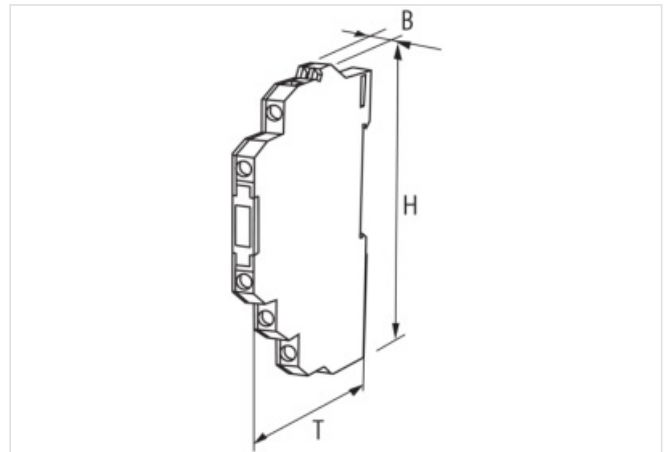
Model designation: MIRO,TR,24VDC,1WECHS.,SK

Transistor 0.5 A

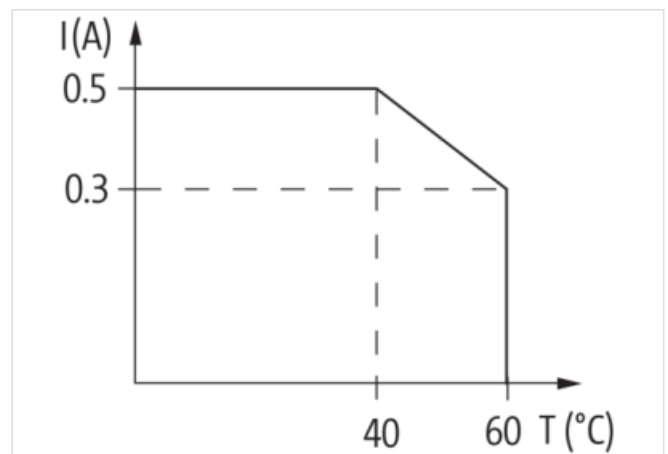
24 V DC

electr. NO/NC contact

Screw terminals

[Link to Product](#)
Illustration


Product may differ from Image


Header

Material short text

MIRO,TR,24VDC,1WECHS.,SK

Commercial data

URL Webshop	https://shop.murrelektronik.com/52510
GTIN	4048879026864
ECLASS-6.0	27371604
ECLASS-6.1	27371604
ECLASS-7.0	27371604
ECLASS-7.1	27371604
ECLASS-8.0	27371604
ECLASS-8.1	27371604
ECLASS-9.0	27371604
ECLASS-9.1	27371604
ECLASS-10.0.1	27371604
ECLASS-10.1	27371604
ECLASS-11.0	27371604
ECLASS-11.1	27371604
ECLASS-12.0	27371604
ECLASS-13.0	27371604
ECLASS-14.0	27371604
ETIM-5.0	EC001504
ETIM-6.0	EC001504
ETIM-7.0	EC001504
ETIM-8.0	EC001504
customs tariff number	85414900
EAN	4048879026864
Packaging unit	1
Electrical data Input	
Input voltage DC min.	10 V
Input voltage DC max.	53 V
Input voltage OFF DC min.	0 V
Input voltage OFF DC max.	5 V
Current input AC	6,5 mA
Electrical data Output	
Voltage drop DC max.	1,2 V
Quiescent current OFF max.	0,1 mA
Switch on delay max.	40 µs
Switch off delay max.	150 µs
Voltage switching DC min.	5 V
Switching voltage DC max.	48 V
Switching current min.	0,1 mA
Switching current max.	0,5 A
Switching frequency max.	10 Hz
Diagnostics	
Status indication LED	yellow
Device protection Electrical	
Rated insulation voltage	3.750 V
Device protection Media	
Flame resistance	flame retardant
Mechanical data Material data	
Material housing	Plastic
Color housing	black
Mechanical data Mounting data	
Height	91 mm

Width	6,2 mm
Depth	71 mm
Mounting method	geschnappt
Suitable for mounting type	(EN 60715), mounting rail

Environmental characteristics | Climatic

Operating temperature min.	-20 °C
Operating temperature max.	60 °C

Connection type 5

Family construction form	terminal
No. of poles	1
Gender	female
Color contact carrier	green
Connection	Screw terminals SK
PIN 1	11 +
Family construction form	terminal
No. of poles	1
Gender	female
Color contact carrier	green
Connection	Screw terminals SK
PIN 1	12
Family construction form	terminal
No. of poles	1
Gender	female
Color contact carrier	green
Connection	Screw terminals SK
PIN 1	14
Family construction form	terminal
No. of poles	1
Gender	female
Color contact carrier	green
Connection	Screw terminals SK
PIN 1	A 1
Family construction form	terminal
No. of poles	1
Gender	female
Color contact carrier	green
Connection	Screw terminals SK
PIN 1	A 2