




1) Sensing surface, 2) Housing, 3) Cover, 4) Potentiometer, 5) NO or NC selectable, 6) LED function indicator

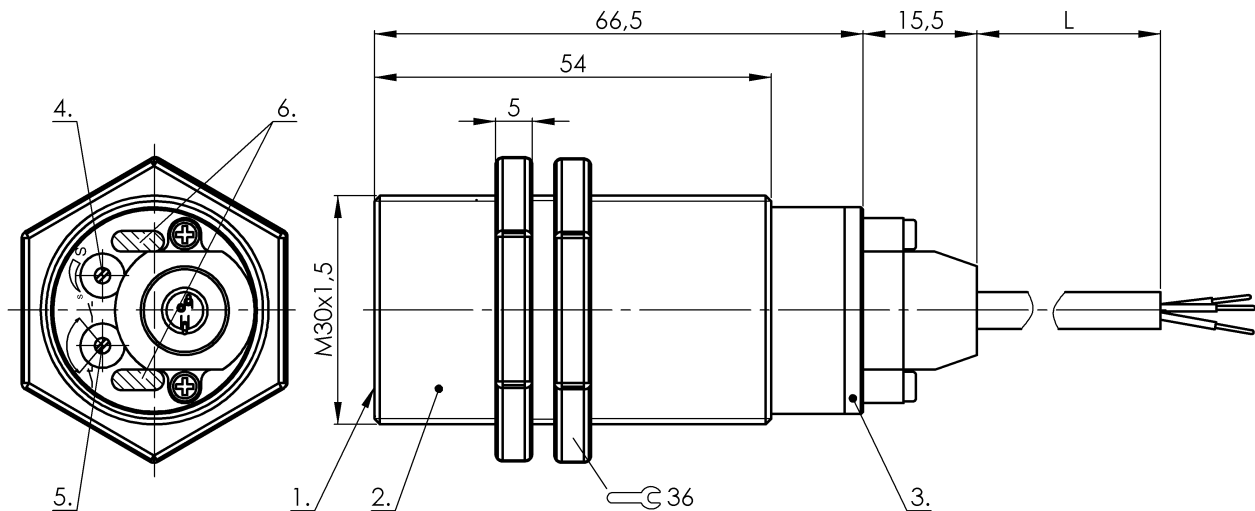

Basic features

Approval/Conformity	CE UKCA cULus WEEE
Basic standard	IEC 60947-5-2
Scope of delivery	Nut (2x) Short guide Screwdriver
Sensitivity	Switching distance adjustable
Series	M30

Display/Operation

Function indicator	yes
Power indicator	yes

Electrical connection

Cable length L	2 m
Conductor cross-section	0.34 mm²
Number of conductors	3
Polarity reversal protected	yes
Protection against device mix-ups	yes
Short-circuit protection	yes

Electrical data

No-load current I_0 max. at U_e	18 mA
Operating voltage U_b	10...35 VDC
Rated insulation voltage U_i	75 V DC
Rated operating current I_e	300 mA
Ripple max. (% of U_e)	10 %
Switching frequency	100 Hz
Utilization category	DC -13
Voltage drop static max.	1.8 V

Environmental conditions

Ambient temperature	-30...70 °C
Contamination scale	1
IP rating	IP66, IP64 at cable exit

Functional safety

MTTF (40 °C)	455 a
--------------	-------

Interface

Switching output	PNP NO/NC programmable
------------------	------------------------

Material

Cover material	PBT PE
Housing material	PBT
Material jacket	PUR
Material sensing surface	PBT

Mechanical data

Dimension	Ø 30 x 82 mm
Installation	for flush mounting
Size	M30x1.5
Thread (A)	M30x1.5
Tightening torque	4 Nm

Range/Distance


Hysteresis H max. (% of Sr)	15.0 %
Measuring range	1...20 mm
Rated operating distance Sn	20 mm
Repeat accuracy max. (% of Sr)	5.0 %
Temperature drift max. (% of Sr)	20 %

Remarks


The potentiometer does not have a fixed stop, but can be turned endlessly without destroying anything.
If no change in the switching signal is detected, the potentiometer should be turned forwards or backwards until a signal change occurs at the output.
For more information about MTTF and B10d see MTTF / B10d Certificate

Indication of the MTTF- / B10d value does not represent a binding composition and/or life expectancy assurance; these are simply experiential values with no warranty implications. These declared values also do not extend the expiration period for defect claims or affect it in any way.

Wiring Diagrams (Schematic)



Installation remarks



1) Machine GND