


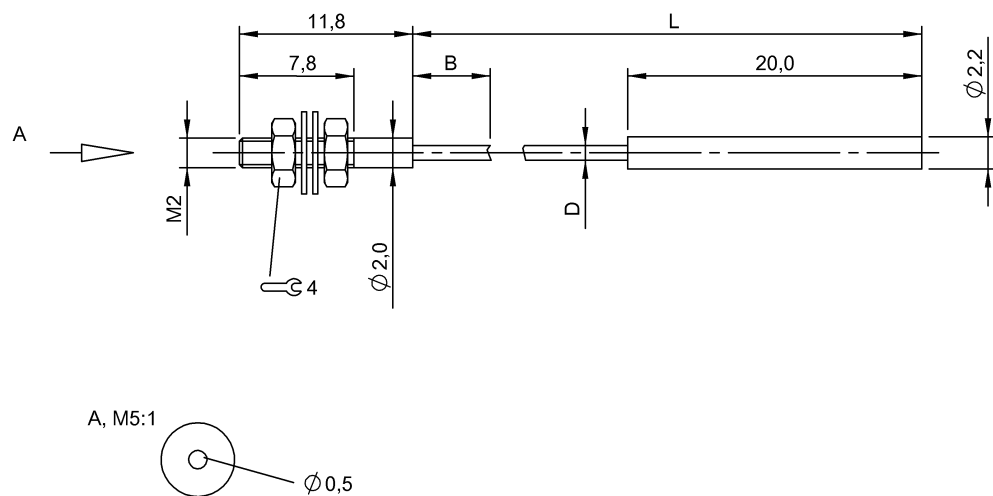

Basic features

Basic standard	IEC 60947-5-2
Reference base unit	BFB 75K-001-..
Use	for fiber optic base units BFB
Version	M2, standard

Environmental conditions

Ambient temperature	-40...60 °C
Ambient temperature connection area	Acc. to fiber optic sensor
IP rating	IP65

Material

Active surface, fiber arrangement	Single fiber
Fiber type material	PMMA
Housing material	Brass, nickel-plated
Material jacket	PE
Surface protection	nickel-plated

Mechanical data

Active surface, fibers	Ø 0.5 mm
Cable diameter D	1.00 mm
Cable length L	1 m
Cable, bending radius min.	15 mm
Connection	Ø 2.2 mm
Connection type	Adapter sleeve, 1.00 m, PE
Dimension	Ø 2 x 12 mm
Fiber optic cable, structure	Single fiber in plastic jacket
Length B min., without bending	20.00 mm
Mounting part	M2 nut
Tensile load max. at 20 °C	6 N (max. 3s)

Range/Distance

Range	140 mm
Rated operating distance Sn	140 mm
Real switching distance sr	140 mm

Remarks

The cutting tool is included in the scope of delivery order other accessories separately.

Cut cable to length: use suitable cutting tool. Make a single cut, vertical to cable axis. The cut quality can affect the switching distance.

Route fiber optic cable so that no excessive tensile, compression or torsional forces are permitted. Observe permissible bending radiuses. Installation may affect the switching distance.

The scope of delivery includes one set of fiber optics for the transmitter and one for the receiver.

Opto Symbols

