

B10 Bulkhead mounted h., IP65

Double locking lever m.

Art.No.: 70MH-GAENQ-B000000
Weight: 0,143 kg
Country of origin: CZ
Model designation: MSMH-GA-B10N-QVMB-IP65-SDN


B10
Bulkhead mounted housing
Double locking lever
IP65
Technical data will be only guaranteed with Murrelektronik components.

Link to Product

Illustration



Product may differ from Image

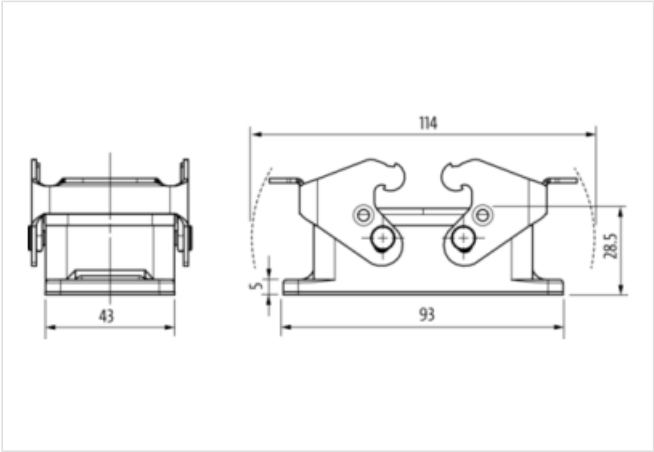

Commercial data

URL Webshop	https://shop.murrelektronik.com/70MH-GAENQ-B000000
GTIN	4048879644945
Customs tariff number	85389099
ECLASS-6.0	27143424
ECLASS-6.1	27261203
ECLASS-7.0	27440202
ECLASS-7.1	27440202
ECLASS-8.0	27440202
ECLASS-8.1	27440202
ECLASS-9.0	27440202
ECLASS-9.1	27440202
ECLASS-10.0.1	27440202
ECLASS-10.1	27440202
ECLASS-11.0	27440202
ECLASS-11.1	27440202
ECLASS-12.0	27440202
ECLASS-13.0	27440202
ECLASS-14.0	27440202
ETIM-5.0	EC000437
ETIM-6.0	EC000437
ETIM-7.0	EC000437

ETIM-8.0	EC000437
customs tariff number	85389099
EAN	4048879644945
Packaging unit	1
Installation Connection	
Mating cycles min.	500
Device protection Electrical	
Degree of protection (EN IEC 60529)	IP65
Additional condition protection degree	locked, with screw connection, inserted
Mechanical data	
Housing type	Bulkhead mounted housing
Mechanical data Material data	
housing	Aluminum die casting
Coating housing	powder-coated
Locking material	Steel
Coating locking	galvanized
Gasket	NBR
Mechanical data Mounting data	
Height	28,5 mm
Width	43 mm
Depth	93 mm
Locking techniques	Double locking lever
Size	B10
Environmental characteristics Climatic	
Operating temperature min.	-40 °C
Operating temperature max.	100 °C
Climatic category (EN IEC 60068-1)	40/100/21