

B10 Hood, low profile, IP65

Double locking lever, top entry M20

Art.No.: 70MH-GTENQ-A01B000
Weight: 0,150 kg
Country of origin: CZ
Model designation: MSMH-GT-B10N-QVBO-geradeM20-IP65-SDN


B10
Hood (low)
Double locking lever
IP65
Technical data will be only guaranteed with Murrelektronik components.

Link to Product

Illustration



Product may differ from Image

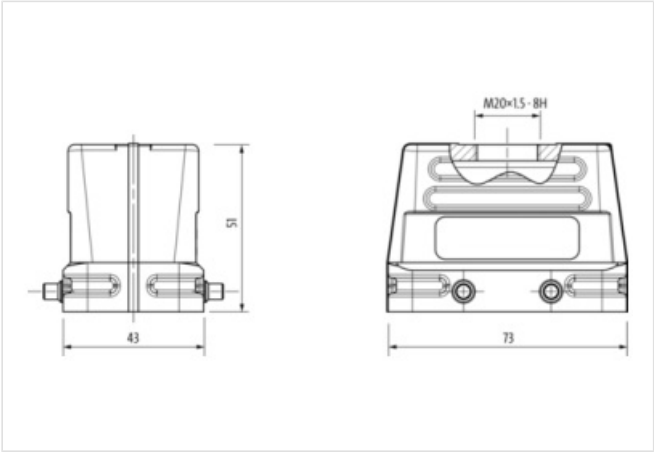

Commercial data

URL Webshop	https://shop.murrelektronik.com/70MH-GTENQ-A01B000
GTIN	4048879646284
Customs tariff number	85389099
ECLASS-6.0	27143424
ECLASS-6.1	27261203
ECLASS-7.0	27440202
ECLASS-7.1	27440202
ECLASS-8.0	27440202
ECLASS-8.1	27440202
ECLASS-9.0	27440202
ECLASS-9.1	27440202
ECLASS-10.0.1	27440202
ECLASS-10.1	27440202
ECLASS-11.0	27440202
ECLASS-11.1	27440202
ECLASS-12.0	27440202
ECLASS-13.0	27440202
ECLASS-14.0	27440202
ETIM-5.0	EC000437
ETIM-6.0	EC000437
ETIM-7.0	EC000437

ETIM-8.0	EC000437
customs tariff number	85389099
EAN	4048879646284
Packaging unit	1
Installation	
Cable outlet	straight
Installation Connection	
Mounting set	M20
Mating cycles min.	500
Device protection Electrical	
Degree of protection (EN IEC 60529)	IP65
Additional condition protection degree	locked, with screw connection, inserted
Mechanical data	
Housing type	Hood
Mechanical data Material data	
housing	Aluminum die casting
Coating housing	powder-coated
Locking material	Steel
Coating locking	galvanized
Mechanical data Mounting data	
Height	51 mm
Width	43 mm
Depth	73 mm
Looking techniques	Double locking lever
Size	B10
Environmental characteristics Climatic	
Operating temperature min.	-40 °C
Operating temperature max.	100 °C
Climatic category (EN IEC 60068-1)	40/100/21