




Inductive sensor

IGA4008-CPKG/US-104

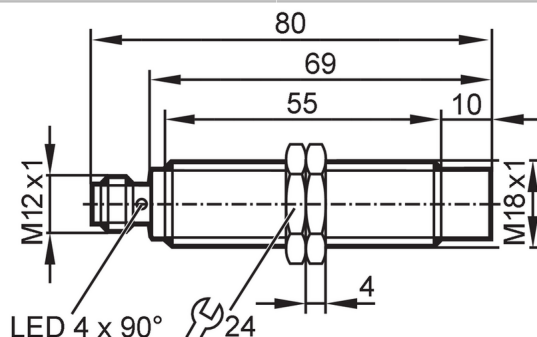

Product characteristics

Electrical design	PNP
Output function	complementary
Sensing range [mm]	8
Housing	threaded type
Dimensions [mm]	M18 x 1 / L = 80

Electrical data

Operating voltage [V]	10...30 DC
Current consumption [mA]	< 10
Protection class	II
Reverse polarity protection	yes

Outputs

Electrical design	PNP
Output function	complementary
Max. voltage drop switching output DC [V]	2.5
Permanent current rating of switching output DC [mA]	200
Switching frequency DC [Hz]	300
Short-circuit protection	yes
Overload protection	yes

Detection zone

Sensing range [mm]	8
Real sensing range S_r [mm]	$8 \pm 10\%$
Operating distance [mm]	0...6.48

Accuracy / deviations

Correction factor	steel: 1 / stainless steel: 0.7 / brass: 0.5 / aluminium: 0.4 / copper: 0.3
Hysteresis [% of S_r]	3...15
Switch point drift [% of S_r]	-10...10

Operating conditions

Ambient temperature [°C]	-25...80
Protection	IP 65



Inductive sensor

IGA4008-CPKG/US-104

Tests / approvals		
EMC	EN 60947-5-2	
	EN 55011	class B
MTTF	[years]	1349
Embedded software included		yes

Mechanical data	
Weight	[g] 70.5
Housing	threaded type
Mounting	non-flush mountable
Dimensions	[mm] M18 x 1 / L = 80
Thread designation	M18 x 1
Materials	housing: brass white bronze coated; LED window: PEI; lock nuts: brass white bronze coated; sensing face: PBT orange

Displays / operating elements		
Display	switching status	1 x LED, yellow

Accessories	
Items supplied	lock nuts: 2

Remarks	
Pack quantity	1 pcs.

Electrical connection - plug	
Connector: 1 x M12; coding: A; Contacts: 4	
	

Connection	
