



NX series RFID safety switches with lock



NX series RFID safety switches with lock

Description



The safety switches of the NX series are the most compact on the market, making them the perfect solution for use in the smallest of spaces. These switches are used primarily on machines where the hazardous conditions remain for a while, even after the machines have been switched off; for example, mechanical parts such as pulleys, saw blades, etc., could continue to move, or parts of the machine could still be hot or under pressure. Thus, the switches can also be used if individual guards are only to be opened under certain conditions. Versions with mode 1 (safety outputs active when guard closed and locked) are interlocks with guard locking acc. to

ISO 14119; the product is labelled with the symbol shown.



Bistable operating principle

The safety switch of the NX series is designed as bistable switch. This means that the internal solenoid that locks and unlocks the device does not operate in the normally de-energised or normally energized mode, but in the bistable mode, i.e., it is stably in the locked or unlocked position. The command for locking and unlocking continues to follow the "power-ON released" logic, i.e., as long as voltage is applied to the activation inputs of the solenoid, the actuator is unlocked. This approach offers numerous advantages, including, among others, the locked or unlocked state being retained even if the device should experience a power failure. Bistable operation of the internal solenoid ensures that the NX switch remains stably in the state to which it was last actuated.

Maximum safety with a single device


PL e + SIL 3

The NX series switches are constructed with redundant electronics. As a result, the maximum PL e and SIL 3 safety levels can still be achieved through the use of a single device on a guard. This avoids expensive wiring in the field and allows faster installation. Inside the control cabinet, the two electronic safety outputs must be connected to a safety module with OSSD inputs or to a safety PLC.

Series connection of several switches

PL e + SIL 3


One of the most important features of the NX series is the possibility of connecting up to 32 sensors in series, while still maintaining the maximum safety levels PL e laid down in EN ISO 13849-1 and SIL 3 acc. to EN IEC 62061. This connection type is permissible in safety systems which have a safety module at the end of the chain that monitors the outputs of the last NX switch. The fact that the PL e safety level can be maintained even with 32 sensors connected in series demonstrates the extremely secure structure of each single device.

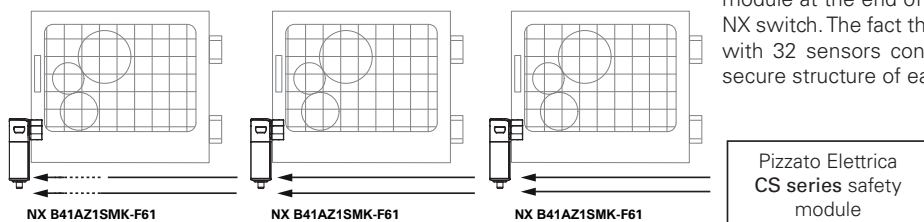

Series connection with other devices

PL e + SIL 3

The NX series features two safety inputs and two safety outputs, which can be connected in series with other Pizzato Elettrica safety devices. This option allows the creation of safety chains containing various devices. For example, stainless steel safety hinges (HX BEE1 series), transponder sensors (ST series) and door lock sensors (NX series) can be connected in series while still maintaining the maximum PL e and SIL 3 safety levels.

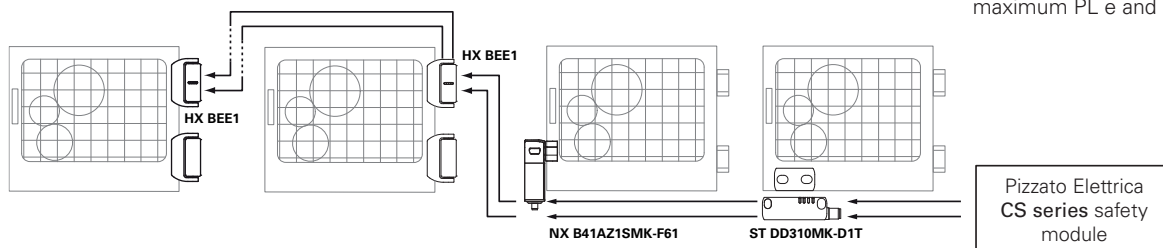

RFID actuators with high coding level



The NX series is provided with an electronic system based on RFID technology to detect the actuator. This allows to provide each actuator with different coding and makes it impossible to tamper with a device by using another actuator of the same series. Millions of different coding combinations are possible for the actuators. They are therefore classified as high level coded actuators, according to EN ISO 14119.

Holding force of the locked actuator




6000 N

The strong interlocking system guarantees a maximum actuator holding force of $F_{TEST} = 6000 \text{ N}$.



Cover with multicolour signalling

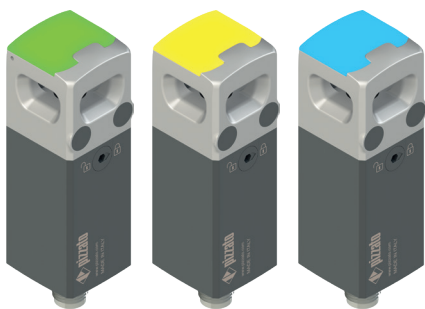

The switches of the NX series are the only switches in their market segment equipped with a large, illuminated RGB-LED cover that enables the fast and immediate diagnosis of the function states. As a result, this display can also easily be read from a distance and from all viewing angles.

Metal head and technopolymer body




The housing of NX series switches is made of two materials:


- The metal head ensures maximum resistance to impacts from the actuator and resistance to pulling when the door is locked;
- The technopolymer body ensures a low weight and provides flexibility in the design. Hex-key auxiliary releases are mounted on the body, with versions featuring one front release or three releases located at the front and on the sides.

Output with cable or connector

The electrical connection via M12 connector, integrated cable or integrated cable with M12 connector, makes the device suitable for the most diverse applications. The connector versions allow faster device replacement and installation, by making incorrect wiring connection impossible. Versions with cable can be ordered with various cable lengths.

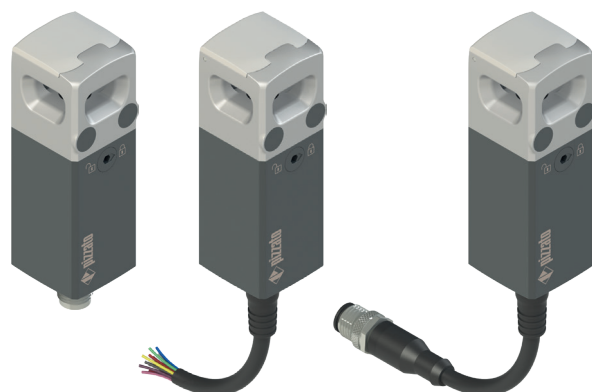

Three inputs for the actuators

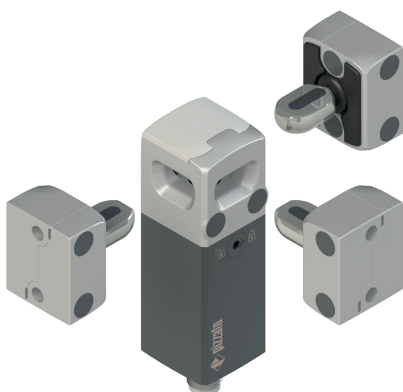

The switch is always mounted using the two front screws, whereby it does not matter whether the doors open to the right or left or if they are sliding or hinged doors. This is made possible by the three inputs for the actuator: one on the front and two on the sides. This eliminates the need to rotate the head or switch.

Switch mounting



The switch is fixed directly to the metal head with two M5 screws with a hole spacing of 20 mm. The arrangement of the fixing points near the actuator's point of traction allows the loads to be distributed on a robust and compact metal structure. This ensures that the switch can withstand considerable mechanical loads without being damaged or deformed in spite of its compact dimensions. Furthermore, this type of fixing prevents mechanical loads from acting on the switch body.

Holding force of the unlocked actuator



20 N

The inside of each switch features a device which holds the actuator in its closed position. Ideal for all those applications where several guards are unlocked simultaneously, but only one is actually opened. The device keeps all the unlocked guards in their position with a retaining force of approx. 20 N, stopping any vibrations or gusts of wind from opening them.


Function for protecting against recoil forces



If a guard is closed too quickly or with so much force that the recoil would cause it to open again, a special function in the NX switch prevents locking. This function prevents the immediate locking of the guard if the lock signal is applied. This protects the switch against recoil forces that occur during instantaneous locking, thus avoiding possible damage to the device.

NX series RFID safety switches with lock

Hex-key release device and escape release button




The hex-key release device (auxiliary release) enables actuator release exclusively using a hexagonal key. The device also functions with no power supply and, once actuated, prevents the guard from being locked. The switch is available with either a front auxiliary release or three auxiliary releases located on three sides of the switch.




The escape release button allows actuator release and immediate opening of the guard. Generally used in machines within which an operator could inadvertently become trapped, it faces towards the machine interior, to allow the operator to exit even in the event of a power failure. The button has two stable states and can be freely extended in length with suitable extensions (see accessories).

Jointed actuator for inaccurately closing guards




The actuator for the switches of the NX series is articulated, thereby allowing the actuator pin to be safely guided into the switch through the centring hole. As a result, the actuator and switch do not need to be precisely aligned during installation.

Guided insertion of the actuator

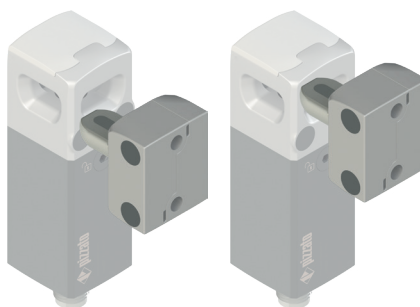


The actuator is always guided during insertion into the switch head. Any misalignments of the panels that arise during installation can thereby be corrected, thus ensuring precise and optimum positioning.

Rotatable actuator

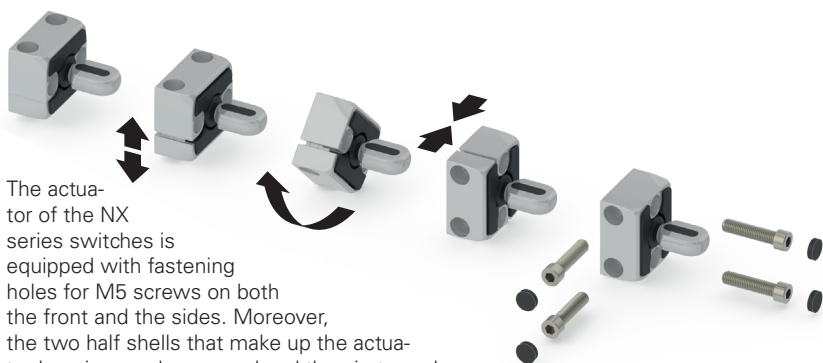

The actuator of the NX series switches is equipped with fastening holes for M5 screws on both the front and the sides. Moreover, the two half shells that make up the actuator housing can be opened and the pin turned so that the working plane of the actuator can be rotated by 90°.

Protection against tampering

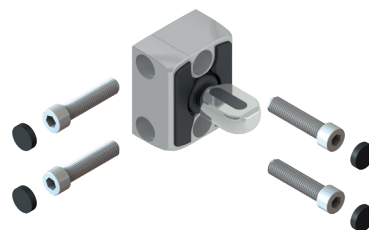


Each actuator of the NX series is supplied with snap-on protection caps. Not only do the caps prevent dirt from accumulating and simplify cleaning, they also block access to the fastening screws of the actuator. As a result, standard screws can be used instead of tamper-proof screws.

Versions in AISI 316L stainless steel



The new NX version with external parts in AISI 316L stainless steel is suitable for environments where hygiene and cleanliness are a priority. The choice of stainless steel for the metal parts enables use of these devices for many different applications, ranging from the food industry to pharmaceuticals, chemicals and marine applications.

Mounting the switches directly next to one another



The safety switches of the NX series are designed so that they can be mounted directly next to one another, as shown in the figure: If they are placed next to one another, no minimum mounting distance needs to be maintained to prevent electromagnetic interference. This makes the NX switch suitable for mounting in applications in which only little space is present between the doors.

External device monitoring

EDM

On request, the switch can be supplied with EDM function (External Device Monitoring). In this case, the switch itself checks the proper function of the devices connected to the safety outputs. These devices (usually relays or safety contactors) must send a feedback signal to the EDM input, which checks that the received signal is consistent with the state of the safety outputs.



Two safety output actuation modes

MODE 1 MODE 2

The device is available with 2 different actuation modes for safety outputs:

- Mode 1: safety outputs active with inserted and locked actuator, for machines with inertia;
- Mode 2: safety outputs active with inserted actuator, for machines without inertia.

High protection degree

IP69K IP67

These devices are designed to be used in the toughest environmental conditions and they pass the IP67 immersion test acc. to EN 60529. They can therefore be used in all environments where the maximum degree of protection is required for the housing. Due to their special design, these devices are suitable for use in equipment subjected to cleaning with high pressure hot water jets. These devices meet the IP69K test requirements according to ISO 20653 (water jets with 100 bar and 80°C).

Fixing brackets

To facilitate installation of the switch on 30 and 40 mm profiles, special brackets have been designed for sliding or hinged doors, with installation possible inside or outside the door.


See page 13 for a complete list of brackets and their uses.




LK X lock-out device for NX series switches

The LK X series lock-out device has a full-metal construction and is designed for installation on the fixing bracket (optional) of the NX series safety switch.

With the lock-out active, the three actuator inputs are mechanically blocked, preventing accidental closure of the guard and inadvertent re-start of the machine.

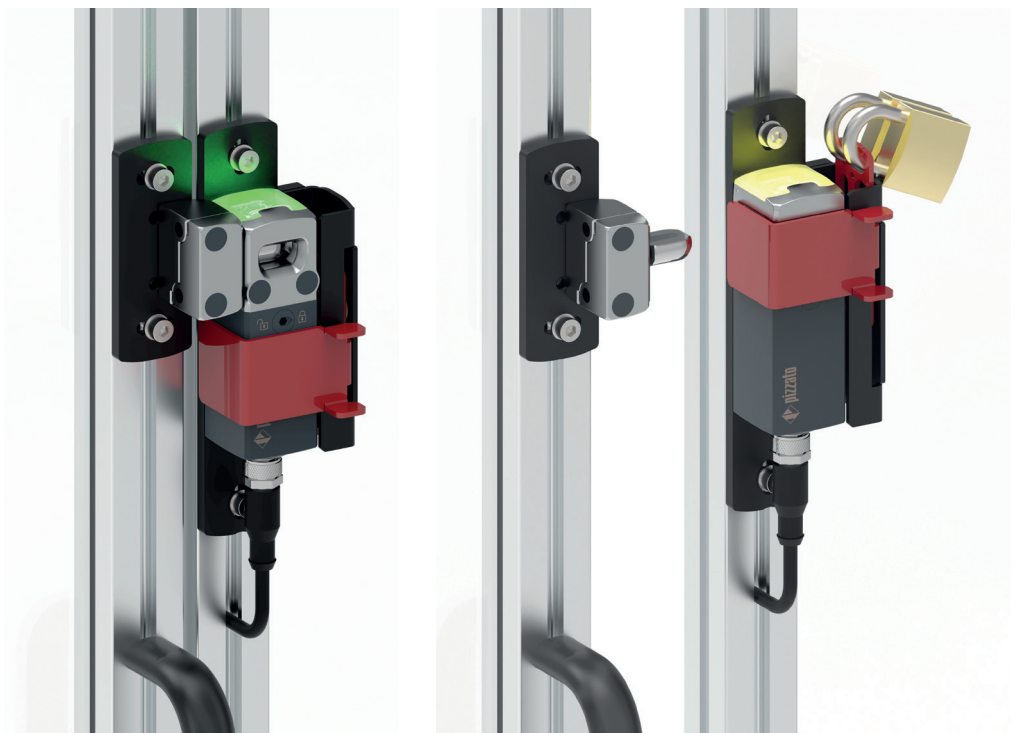

Selection diagram

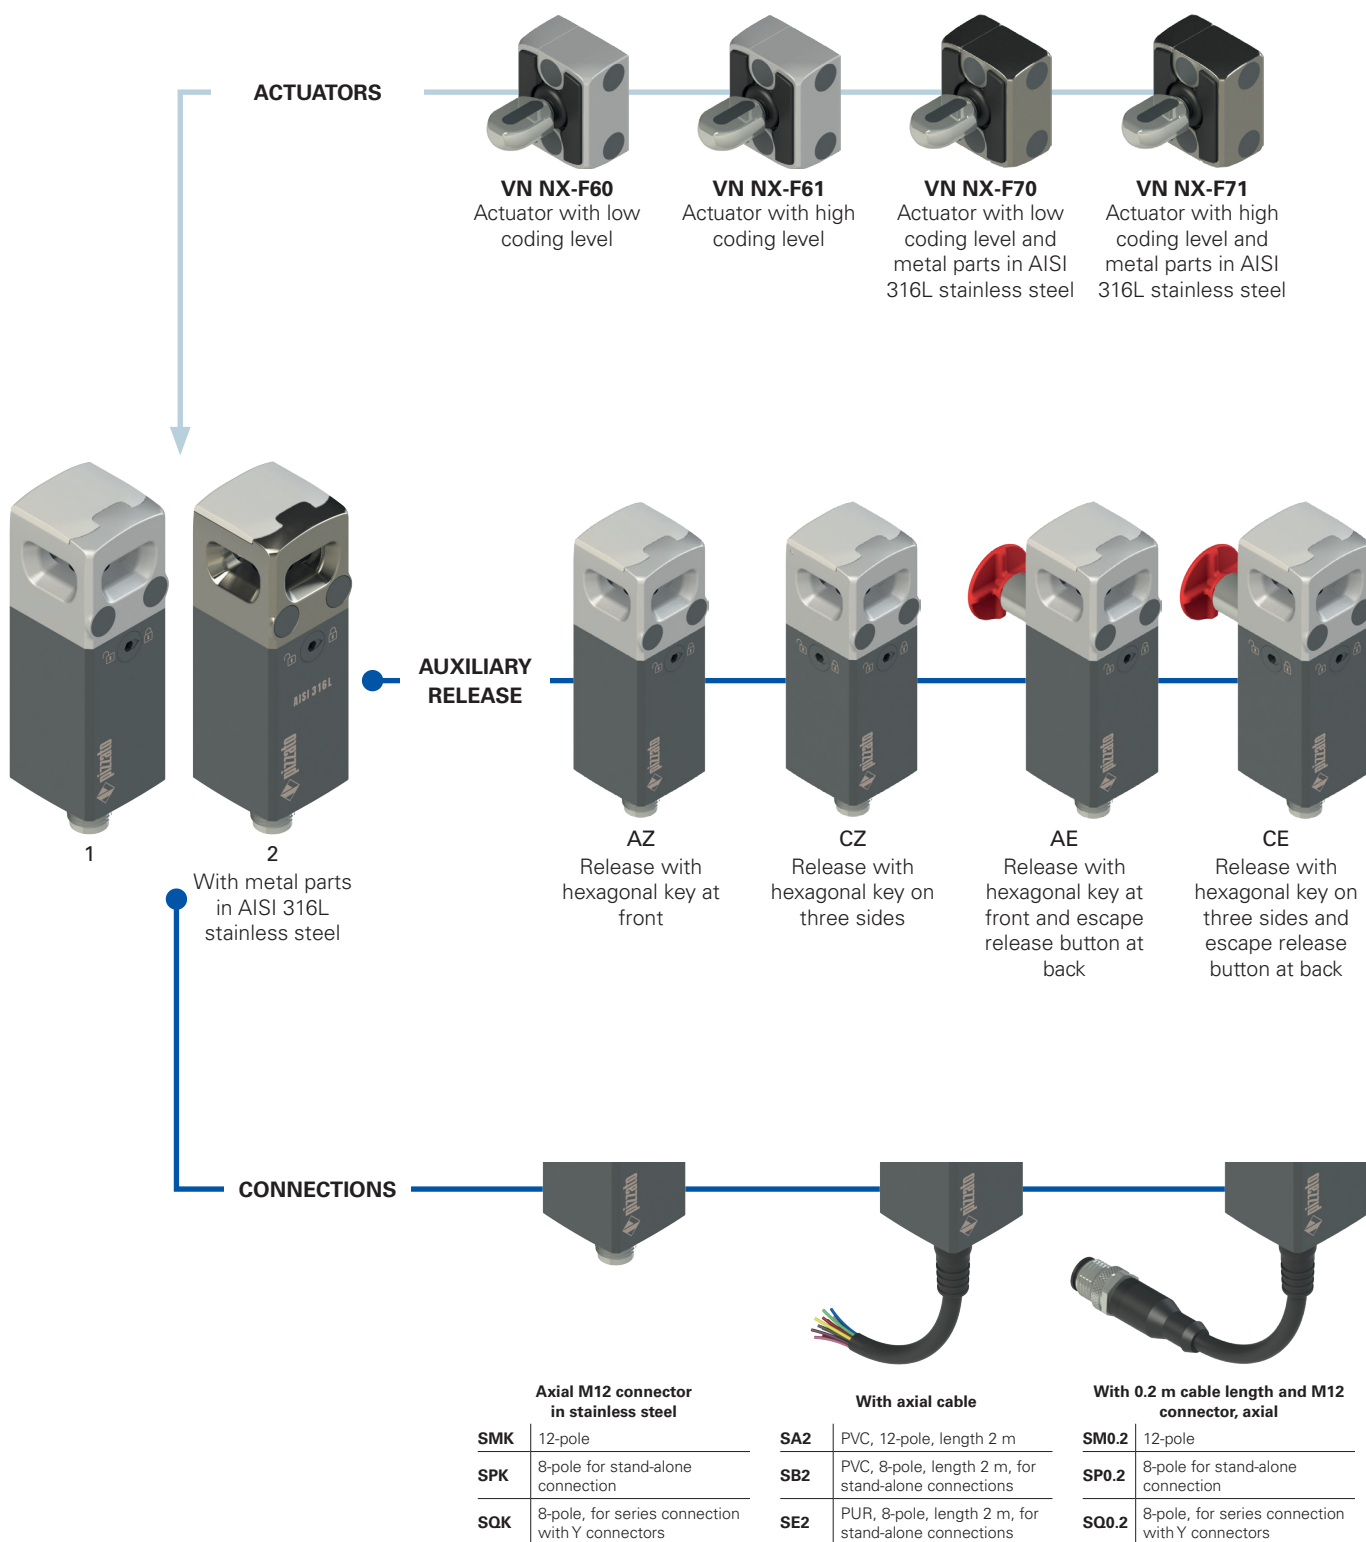

—●— product option
—→— Product sold separately



Code structure

Attention! The feasibility of a code number does not mean the effective availability of a product. Please contact our sales office.

article options

NX B42AZ1SMK-F61LP30

Type of operation and activation mode of the safety outputs

B	Mode 1 of bistable solenoid. Activation of OS1 and OS2 with inserted and locked actuator.
P	Mode 2 of bistable solenoid. Activation of OS1 and OS2 with inserted actuator.

Inputs and outputs

3	2 safety inputs IS1, IS2 2 safety outputs OS1, OS2 1 signalling output O3: actuator inserted 1 signalling output O4: actuator locked 2 inputs for solenoid activation IE1, IE2 1 reset input I3
4	2 safety inputs IS1, IS2 2 safety outputs OS1, OS2 1 signalling output O3: actuator inserted 1 signalling output O4: actuator locked 2 inputs for solenoid activation IE1, IE2 1 programming / reset input I3
5	2 safety inputs IS1, IS2 2 safety outputs OS1, OS2 1 signalling output O3: actuator inserted 1 signalling output O4: actuator locked 2 inputs for solenoid activation IE1, IE2 1 programming / reset input I3 1 feedback input EDM I5

Actuator recognition

1	Actuator pre-programmed in the factory (Available only for articles NX •3•••••••) (Supplied only together with actuator)
2	Reprogrammable actuator (Available only for articles NX •4••••••• and NX •5•••••••)

Auxiliary release

AZ	Release with hexagonal key at front
CZ	Release with hexagonal key on three sides
AE	Release with hexagonal key at front and escape release button at back
CE	Release with hexagonal key on three sides and escape release button at back

Metal parts

1	Standard
2	Version with external metal parts in AISI 316L stainless steel

Release button length

	for max. 15 mm wall thickness (standard)	
LP30	for max. 30 mm wall thickness	Metal extension
LP40	for max. 40 mm wall thickness	
LP50	for max. 50 mm wall thickness	
LP32	for max. 30 mm wall thickness	Stainless steel extension AISI 316L
LP42	for max. 40 mm wall thickness	
LP52	for max. 50 mm wall thickness	

Actuator

F60	Actuator with low coding level VN NX-F60 the switch recognises any type F60 actuator
F61	Actuator with high coding level VN NX-F61 the switch recognises one single type F61 actuator
F70	Actuator with low coding level and metal parts in AISI 316L stainless steel the switch recognises any type F70 actuator
F71	Actuator with high coding level and metal parts in AISI 316L stainless steel the switch recognises one single type F71 actuator

Connection type

K	integrated M12 stainless steel connector
0.2	cable, length: 0.2 m, with M12 connector
2	cable, length: 2 m (standard)
...	...
10	cable, length: 10 m

Cable or connector type

A	PVC cable 12x0.14 mm ²
B	PVC cable 8x0.25 mm ² , for stand-alone connections ⁽¹⁾
E	PUR cable, halogen-free, 8x0.25 mm ² , for stand-alone connections ⁽¹⁾
M	M12 connector, 12-pole (standard)
P	M12 connector, 8-pole, for stand-alone connections ⁽¹⁾
Q	M12 connector, 8-pole, for series connection with Y connectors ⁽²⁾

(1) without inputs IS1, IS2, I5 and without output O4

(2) without inputs IE2, I3, I5 and without output O3. Only available with "inputs and outputs" in version 3

For the complete list of possible combinations please contact our technical department.

Connection output direction

S	cable or connector, axial
----------	---------------------------


Code structure for actuator

VN NX-F60

Actuator

F60	actuator with low coding level the switch recognises any type F60 actuator
F61	actuator with high coding level the switch recognises one single type F61 actuator
F70	actuator with low coding level and metal parts in AISI 316L stainless steel the switch recognises any type F70 actuator
F71	actuator with high coding level and metal parts in AISI 316L stainless steel the switch recognises one single type F71 actuator

NX series RFID safety switches with lock

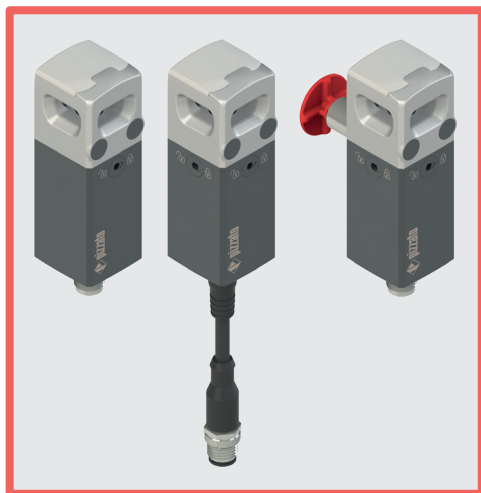

Main features

- Actuation without contact, using RFID technology
- Operating principle with bistable solenoid
- Cover with multicolour signalling
- Digitally coded actuator
- SIL 3 and PL e also with series connection of up to 32 devices
- Max. actuator holding force when locked: 6000 N
- SIL 3 and PL e with a single device
- Uniform fixing, independent of door type
- Protection degrees IP67 and IP69K

Quality marks:



EC type examination certificate: M6A 075157 0036

UL approval: E131787

TÜV SÜD approval: Z10 075157 0035

EAC approval: RU 4-IT-PA07.B.37848/24

ECOLAB approval: 0013/25

In compliance with standards:

EN ISO 14119, EN 60947-5-3, EN IEC 60947-1, EN 60204-1, EN ISO 12100, EN 60529, EN IEC 61000-6-2, EN IEC 61000-6-3, EN 61508-1, EN 61508-2, EN 61508-3, EN ISO 13849-1, EN ISO 13849-2, EN IEC 62061, EN IEC 61326-1, EN 61326-3-1, EN IEC 63000, ETSI EN 301 489-1, ETSI EN 301 489-3, ETSI EN 300 330-2, UL 508, CSA C22.2 No.14

Features approved by UL

Environmental ratings: Type 1, 12, 13.

Electrical ratings:

Main ratings: 24 Vdc Class 2, 0.25 A (output, two channels).
Secondary ratings:
Input Supplied by 24 Vdc Class 2, 0.8 A max.
Output 24 Vdc Class 2, 0.25 A (two channels, the same of main rating).

Auxiliary output 24 Vdc Class 2, 0.1A (two channels).
The minimum T off between two impulses to the coil is 6 seconds.

The models provided with M12 connector may be provided with the mating-connectors-part (with cord attached).
The VN NX locking actuator is an accessory for NX series.

Features approved by TÜV SÜD

Operating voltage: 24 Vdc $\pm 10\%$
Ambient temperature: $-20^{\circ}\text{C} \dots +50^{\circ}\text{C}$
Max. actuation frequency: 600 operating cycles/hour
Max. holding force F_{ZH} : 3000 N
Protection degree: IP67, IP69K

Tested in accordance with: 2006/42/EC, EN IEC 60947-5-2:2020/A11:2022, EN 60947-5-3:2013, EN 61508-1:2010 (SIL 2/3), EN 61508-2:2010 (SIL 2/3), EN 61508-3:2010 (SIL 2/3), EN IEC 62061:2021 (Maximum SIL 3), EN ISO 13849-1:2023 (Cat. 2/4, PL d/e), EN ISO 14119:2013.

Please contact our technical department for the list of approved products.

Technical data

Metal head, glass fibre reinforced technopolymer, self-extinguishing and shock-proof.
Versions with 12x0.14 mm² or 8x0.25 mm² integrated cable, length 2 m, other lengths from 0.5 to 10 m on request.

Versions with integrated M12 stainless steel connector.

Versions with 2 m cable and M12 connector, other lengths from 0.1 ... 3 m on request.

Protection degree: IP67 acc. to EN 60529

IP69K acc. to ISO 20653 (Protect the cables from direct high-pressure and high-temperature jets)

General data

Safety parameters	SIL	PL	Cat.	DC	PFH ₀ [h ⁻¹]	MTTF ₀ [years]
Monitoring function: actuator locked - Mode 1	3	e	4	High	3,07E-10	1688
Monitoring function: actuator present - Mode 2	3	e	4	High	3,07E-10	1694
Dual-channel control for locking function of the actuator	3	e	4	High	2,82E-10	1639
Single-channel control for locking function of the actuator	2	d	2	High	2,82E-10	1639

Interlock with lock, no contact, coded:

Coding level acc. to EN ISO 14119:

type 4 acc. to EN ISO 14119

Low with F•0 actuator

High with F•1 actuator

$-20^{\circ}\text{C} \dots +50^{\circ}\text{C}$

Ambient temperature:

Max. actuation frequency

with actuator lock and release:

Mechanical endurance:

Max. actuation speed:

Min. actuation speed:

Maximum force before breakage F_{TEST} :

Max. holding force F_{ZH} :

Maximum clearance of locked actuator:

Released actuator extraction force:

600 operating cycles/hour

1 million operating cycles

0.5 m/s

1 mm/s

6000 N acc. to EN ISO 14119

3000 N acc. to EN ISO 14119

2 mm

~ 20 N

Electrical data

Rated operating voltage $U_{\text{e SELV}}$:

Operating current at U_{e} voltage:

24 Vdc $\pm 10\%$

minimum 60 mA;

max. 0.45 A upon solenoid activation;

0.8 A with all outputs at maximum power

32 Vdc

Rated insulation voltage U_{i} :

Rated impulse withstand voltage U_{imp} :

External protection fuse:

Overvoltage category:

Electrical endurance:

Solenoid duty cycle:

Power consumption of the solenoid during transitions from locked to unlocked:

1.5 kV

2 A type gG or equivalent device

III

1 million operating cycles

100% ED (continuous operation)

10 W

Electrical data of inputs IS1/IS2/I3/IE1/IE2/I5/EDM

Rated operating voltage U_{e1} :

Rated current consumption I_{e1} :

24 Vdc

5 mA

Electrical data of OS1/OS2 safety outputs

Rated operating voltage U_{e2} :

Output type:

Maximum current per output I_{e2} :

Minimum current per output I_{m2} :

Thermal current I_{th2} :

Utilization category:

Short circuit detection:

Overcurrent protection:

Permissible capacitance between outputs:

Permissible capacitance between output and ground:

Activation time of safety outputs OS1 and OS2

after deactivation of inputs:

Response time upon unlocking the actuator:

Response time upon removal of the actuator:

Maximum delay for EDM status change:

24 Vdc

PNP type OSSD

0.25 A

0.5 mA

0.25 A

DC13; $U_{\text{e2}}=24 \text{ Vdc}$, $I_{\text{e2}}=0.25 \text{ A}$

Yes

Yes

< 200 nF

< 200 nF

typically 10 ms, max. 15 ms

typically 15 ms, max. 20 ms

typically 60 ms, max. 200 ms

500 ms

Electrical data of O3/O4 signalling outputs

Rated operating voltage U_{e3} :

Output type:

Maximum current per output I_{e3} :

Utilization category:

Overcurrent protection:

24 Vdc

PNP

0.1 A

DC13; $U_{\text{e3}}=24 \text{ Vdc}$, $I_{\text{e3}}=0.1 \text{ A}$

Yes

RFID sensor data

Assured operating distance S_{ao} :

Assured release distance S_{ar} :

Rated operating distance S_{n} :

Repeat accuracy:

RFID transponder frequency:

Max. switching frequency:

1 mm

10 mm (actuator not locked)

12 mm (actuator locked)

2.5 mm

$\leq 10 \% s_{\text{n}}$

125 kHz

1 Hz

Compliance with the requirements of:


Machinery Directive 2006/42/EC, EMC Directive 2014/30/EU, RED Directive 2014/53/EU, RoHS Directive 2011/65/EU, FCC Part 15.



Actuation mode of the OS1 and OS2 safety outputs

Mode 1


Safety outputs OS1 and OS2 are active when the actuator is inserted and locked.



In case of machines with or without inertia of the dangerous elements.
Safety category of the safety outputs: PL e, SIL 3.


Mode 2

Safety outputs OS1 and OS2 are active when the actuator is inserted.



In case of machines without inertia of the dangerous elements.
Safety category of the safety outputs: PL e, SIL 3.


Selection table for switches with actuator with high coding level

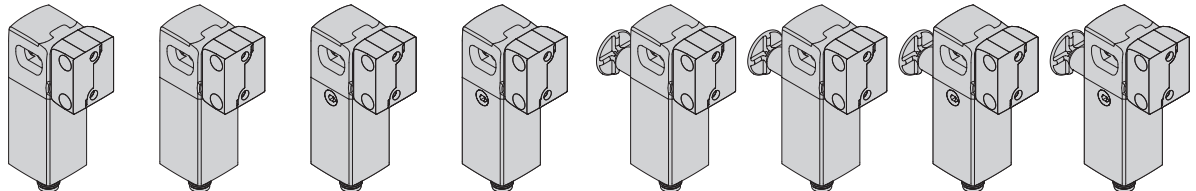

Operating principle	Bistable with hexagonal key release at front	Bistable with hexagonal key release at front With EDM input	Bistable with hexagonal key release on three sides	Bistable with hexagonal key release on three sides With EDM input	Bistable with hexagonal key release at front and escape release button at back	Bistable with hexagonal key at front and escape release button at back With EDM input	Bistable with hexagonal key release on three sides and escape release button at back	Bistable with hexagonal key release on three sides and escape release button at back With EDM input
Mode 1 	NX B42AZ1SMK-F61	NX B52AZ1SMK-F61	NX B42CZ1SMK-F61	NX B52CZ1SMK-F61	NX B42AE1SMK-F61	NX B52AE1SMK-F61	NX B42CE1SMK-F61	NX B52CE1SMK-F61
Mode 2	NX P42AZ1SMK-F61	NX P52AZ1SMK-F61	NX P42CZ1SMK-F61	NX P52CZ1SMK-F61	NX P42AE1SMK-F61	NX P52AE1SMK-F61	NX P42CE1SMK-F61	NX P52CE1SMK-F61

To order the version with external metal parts in stainless steel, modify the code as per the example: **NX1...-F6• → NX2...-F7•**


Selection table for switches

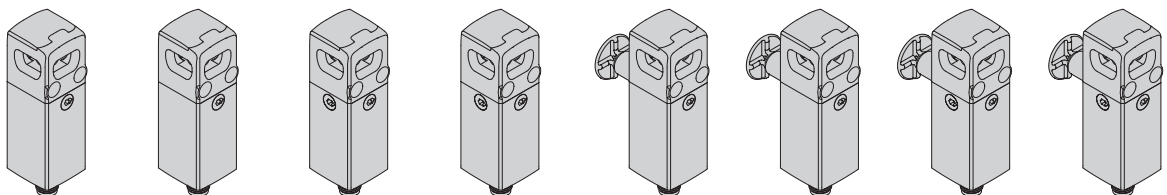

Operating principle	Bistable with hexagonal key release at front	Bistable with hexagonal key release at front With EDM input	Bistable with hexagonal key release on three sides	Bistable with hexagonal key release on three sides With EDM input	Bistable with hexagonal key release at front and escape release button at back	Bistable with hexagonal key at front and escape release button at back With EDM input	Bistable with hexagonal key release on three sides and escape release button at back	Bistable with hexagonal key release on three sides and escape release button at back With EDM input
Mode 1 	NX B42AZ1SMK	NX B52AZ1SMK	NX B42CZ1SMK	NX B52CZ1SMK	NX B42AE1SMK	NX B52AE1SMK	NX B42CE1SMK	NX B52CE1SMK
Mode 2	NX P42AZ1SMK	NX P52AZ1SMK	NX P42CZ1SMK	NX P52CZ1SMK	NX P42AE1SMK	NX P52AE1SMK	NX P42CE1SMK	NX P52CE1SMK

To order the version with external metal parts in stainless steel, modify the code as per the example: **NX1... → NX2...**

Selection table for actuators



Coding level acc. to EN ISO 14119	Article	
	standard	with external metal parts in stainless steel
low	VN NX-F60	VN NX-F70
high	VN NX-F61	VN NX-F71


Type F•0 actuators are all encoded with the same code. This implies that a device associated with an actuator type F•0 can be activated by other actuators type F•0.


Type F•1 actuators are always encoded with different codes. This implies that a device associated with an actuator type F•1 can be activated only by a specific actuator. Another F•1 type actuator will not be recognised by the device until a new association procedure is carried out (reprogramming). After reprogramming, the old actuator F•1 will no longer be recognized.

Reprogramming of the actuator can be performed repeatedly.

NX series RFID safety switches with lock


Operating states

Illumination of the cover	Device state	Description
	OFF	Device switched off.
	RUN	Actuator in safe area and locked. O3 and O4 signalling outputs active. In mode 1: with activation of the IS1 and IS2 safety inputs, the OS1 and OS2 safety outputs are activated.
	RUN	Actuator in safe area. O3 signalling output active. In mode 2: with activation of the IS1 and IS2 safety inputs, the OS1 and OS2 safety outputs are activated.
	RUN	Actuator outside of the activation zone.
	RUN	Actuator programming.
	ERROR	Internal error. Recommended action: restart the device. If the failure persists, replace the device.

Flash sequence of the cover	Device state	Description
	ERROR	Temperature error: The temperature of the device is outside of the permissible range.
	ERROR	Voltage error: the device supply voltage is outside permitted limits.
	ERROR	Error on safety outputs. Recommended action: check for any short circuits between the outputs, outputs and ground or outputs and power supply, then restart the device.
	ERROR	Actuator detection error. Recommended action: check the physical integrity of the device and, in case of failure, replace the entire device. If undamaged, realign the actuator with the device and restart the device.
	ERROR	Error in the EDM ⁽¹⁾ function
	WARNING	Warning: auxiliary release activated or rear escape release button pressed. Deactivate the auxiliary release or the escape release button to lock the actuator
	WARNING	Temperature warning: the device temperature is close to permitted limits.
	WARNING	Warning: movement of the solenoid pin is impeded or the solenoid is overheated
	WARNING	Voltage warning: the device supply voltage is close to permitted limits.
	WARNING	OSSD current warning: the current on the safety outputs is close to the permissible limit values.
	WARNING	Warning: no signal present at the safety inputs.
	WARNING	Warning: signals at the safety inputs inconsistent. Recommended action: check for presence and/or wiring of inputs.
	WARNING	Warning: inputs of the solenoids inconsistent. Recommended action: check for presence and/or wiring of inputs.
	SET	TAG programming finished

⁽¹⁾ Only available in the NX •5••••• versions

Actuation sequence in mode 1

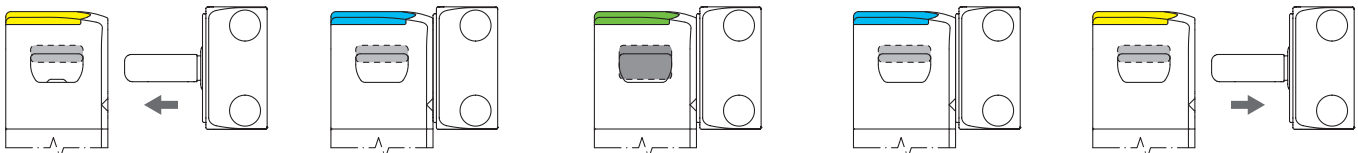

The switch is supplied with power, the IS1 and IS2 inputs are enabled, the OS1 and OS2 safety outputs are disabled. The actuator is outside of the actuation zone (cover illuminates yellow).

If the actuator is brought inside the safe actuation zone (dark grey area), the cover illuminates light blue. In this position, the O3 signalling output (door-closed) is activated. The actuator is not locked.

The IE1 and IE2 inputs can be used to lock the actuator and the cover illuminates green. The OS1 and OS2 safety outputs are enabled. The O4 signalling output is activated at the same time. The safe actuation area is extended in order to allow greater play for the actuator.

The IE1 and IE2 inputs can be used to unlock the actuator (the cover illuminates light blue). The switch disables the OS1 and OS2 safety outputs. The O4 signalling output is deactivated at the same time. The safe actuation area returns to the initial values.

As soon as the actuator leaves the actuation zone, the device deactivates the O3 signalling output and the cover illuminates yellow.


Actuation sequence in mode 2

In contrast to the above mode 2 description, the safety outputs OS1 and OS2 enable when the actuator is detected, and disable when the actuator is no longer detectable.



Complete safety system


The use of complete and tested solutions guarantees the electrical compatibility between the NX series switches and the safety modules from Pizzato Elettrica, as well as high reliability. The switches have been tested with the modules listed in the adjacent table.

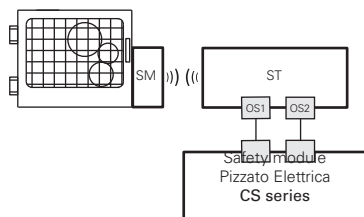


Switches	Compatible safety modules	Safety module output contacts		
		Instantaneous safety contacts	Delayed safety contacts	Signalling contacts
NX1...	CS AR-01•024	2NO	/	1NC
	CS AR-02•024	3NO	/	/
	CS AR-05•024	3NO	/	1NC
	CS AR-06•024	3NO	/	1NC
	CS AR-08•024	2NO	/	/
	CS AT-0•024	2NO	2NO	1NC
	CS AT-1•024	3NO	2NO	/
	CS MP•.....	see page 89 of the General Catalogue PLCs & Safety Modules 2025–2026		
	CS MF•.....	see page 121 of the General Catalogue PLCs & Safety Modules 2025–2026		

NX series switches can be used as individual devices provided that the safety outputs be evaluated by a Pizzato Elettrica safety module (see table for combinable safety modules).

All NX series switches can be connected, provided that compatibility is checked, to safety modules or safety PLCs with OSSD inputs.

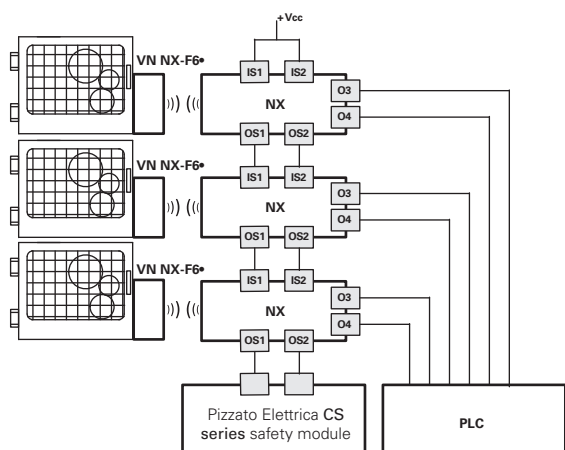


Possibility of series connection of multiple switches for simplifying the wiring of the safety system, whereby only the outputs of the last switch are evaluated by a Pizzato Elettrica safety module (see table with compatible safety modules). Each NX series switch is provided with two signalling outputs which are activated when the guard is closed (O3) or locked (O4). Depending on the specific requirements of the system that has been realised, the signals of the signalling outputs can be evaluated by a PLC.

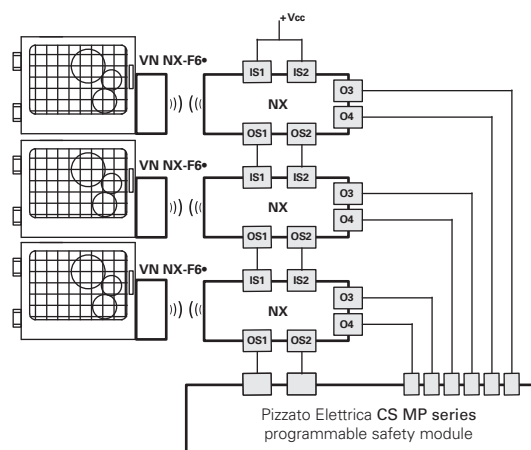

Possibility of series connection of multiple switches for simplifying the wiring of the safety system, whereby only the outputs of the last switch are evaluated by a Pizzato Elettrica safety module of the CS MP series. Both the safety-relevant evaluation and the evaluation of the signalling outputs are performed by the CS MP series.

The examples listed above refer to applications with NX1....

Internal wiring diagram

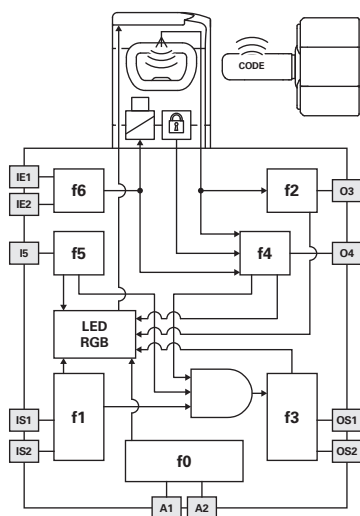

The diagram on the side represents the 7 logic functions which interact inside the device.

Function f0 is a basic function and includes the monitoring of the power supply as well as internal, cyclical tests. Function f1 monitors the status of the device inputs, whereas function f2 monitors the presence of the actuator within the detection areas of the switch.

Function f4 checks the actuator lock condition.

Function f3 is intended to activate or deactivate the safety outputs and check for any faults or short circuits in the outputs.


In the EDM versions, the f5 function verifies the consistency of the EDM signal during safety output state changes.

The safety-related function, which combines the sub-functions mentioned above, activates the safety outputs according to the chosen operating mode:


- Both safety outputs OS1/OS2 for switches in mode 1 are activated only if both IS1/IS2 safety inputs are active and the actuator is inserted and locked;
- Both safety outputs OS1/OS2 for switches in mode 2 are activated only if both IS1/IS2 safety inputs are active and the actuator is inserted;

The f6 function verifies the coherence of the enable/disable signals of the actuator lock command.

External device monitoring (EDM)

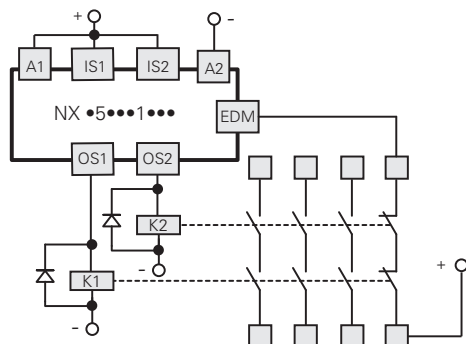

The NX •5•••1••• version, in addition to maintaining the operating and safety characteristics of the NX series, allows control of **forcibly guided NC contacts of contactors or relays** controlled by the safety outputs of the switch itself. As an alternative to the relays or contactors you can use Pizzato Elettrica expansion modules CS ME-03 (see page 79 General Catalogue - PLCs & Safety Modules 2025-2026). This check is carried out via the EDM input (External Device Monitoring as defined in EN 61496-1) of the switch.

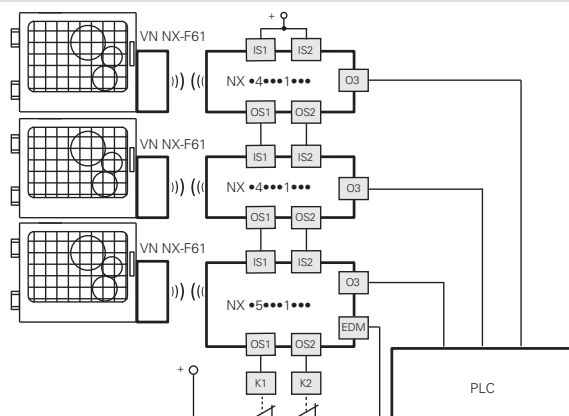

This version, with the IS safety inputs, **can be used at the end of a series of NX switches, up to a maximum number of 32 devices**, while maintaining the maximum PL e safety level and acc. to EN ISO 13849-1 and SIL 3 safety level acc. to EN IEC 62061.

This solution allows you to dispense with the safety module connected to the last device in the chain.


If present, the EDM function must be used.

Connection with safety modules

Connections with CS AR-08•••• safety modules

Input configuration with monitored start


2 channels / Category 4 / up to SIL 3 / PL e

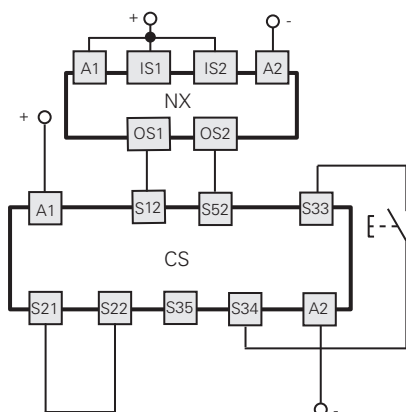

Connections with CS AR-05•••• / CS AR-06•••• safety modules

Input configuration with manual start (CS AR-05••••) or monitored start (CS AR-06••••)


2 channels / Category 4 / up to SIL 3 / PL e

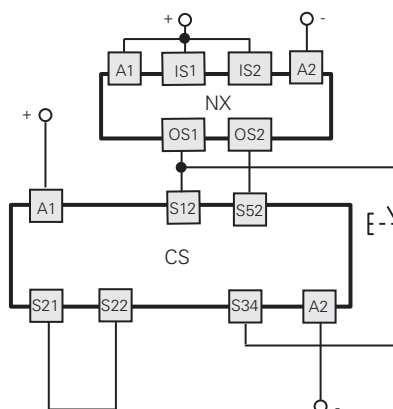

Connections with CS AR-01•••• / CS AR-02•••• / CS AT-0••••• / CS AT-1••••• safety modules

Input configuration with monitored start


2 channels / Category 4 / up to SIL 3 / PL e

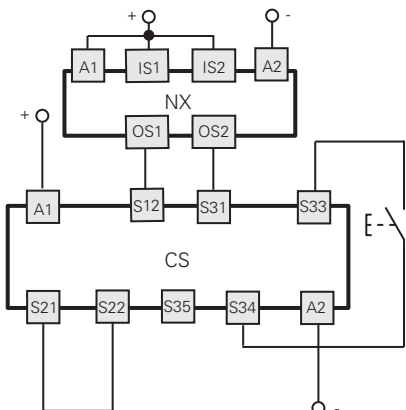

Connections with CS MF•••••, CS MP••••• safety modules

The connections vary according to the program of the module

Category 4 / up to SIL 3 / PL e

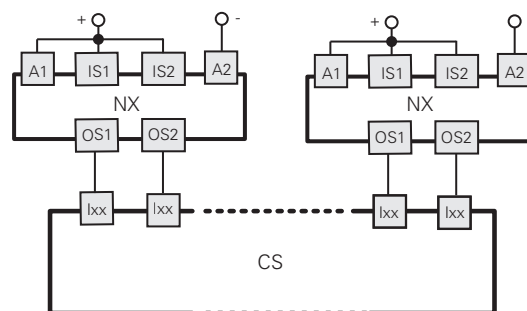


Application example on page 87
General Catalogue - PLCs & Safety Modules 2025-2026



Series connection of several switches


Monitoring function: actuator locked
2 channels / Category 4 / up to SIL 3 / PL e

Single-channel control for locking function of the actuator
1 channel / Category 2 / up to SIL 2 / PL d

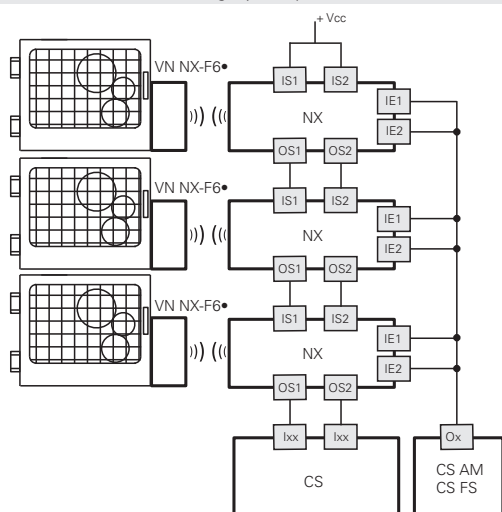




Monitoring function: actuator locked
2 channels / Category 4 / up to SIL 3 / PL e

Dual-channel control for locking function of the actuator
2 channels / Category 4 / up to SIL 3 / PL e

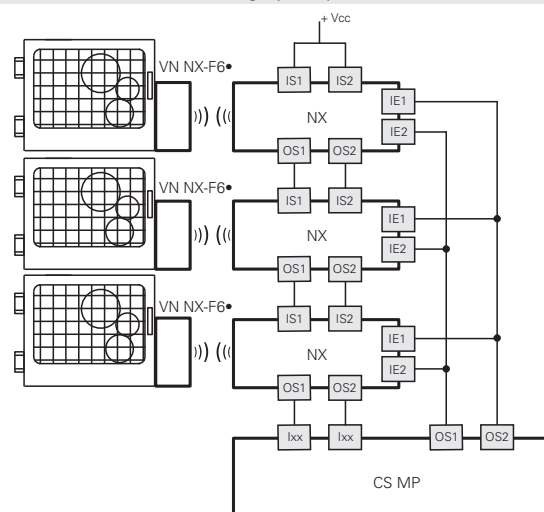

Safety switch internal connections

Versions with connector			Versions with cable		Connection
NXSM• M12 connector, 12-pole	NXSP• M12 connector, 8-pole stand-alone connection	NXSQ• M12 connector, 8-pole series connection with "Y" connectors	NXA• Cable 12x0.14 mm ² outer diameter 6 mm	NXB• NXE• Cable 8x0.25 mm ² outer diameter 7 mm	
3	3	3	White	Green	A2 Supply input 0 V
10	8	8	Purple	Red	IE1 Solenoid activation input
12	5	/	Red-Blue	Grey	IE2 Solenoid activation input
5	2	/	Pink	Brown	O3 Signalling output, actuator inserted
9	/	5(b)	Red	/	O4 Signalling output, actuator inserted and locked
8	6	/	Grey	Pink	I3 Actuator programming input / reset
1	1	1	Brown	White	A1 Supply input +24 Vdc
2	/	2	Blue	/	IS1 Safety input
6	/	6	Yellow	/	IS2 Safety input
11	/	/	Grey-Pink	/	I5 EDM input (a)
4	4	4	Green	Yellow	OS1 Safety output
7	7	7	Black	Blue	OS2 Safety output



(a) Only available in version NX •5•••1•••

(b) Available for 8-pole connector, not available for the end of a chain with Y connectors.







Fixing brackets

Examples of installation on 30 mm profiles

Sliding doors.

Hinged doors.

Hinged doors, with switch installed on the inside of the door.

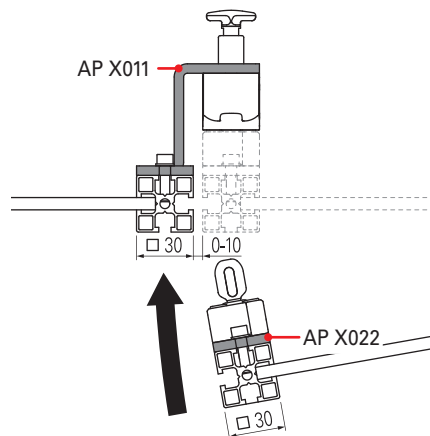
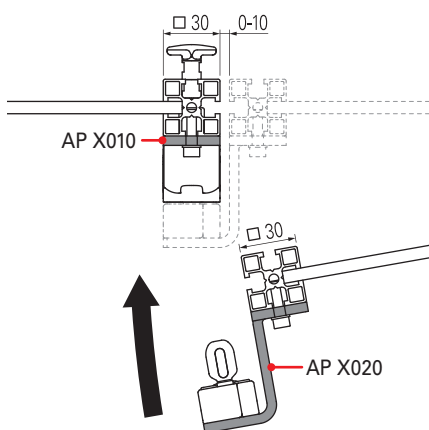
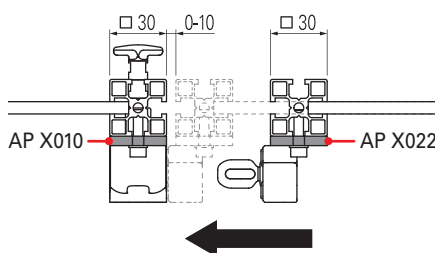
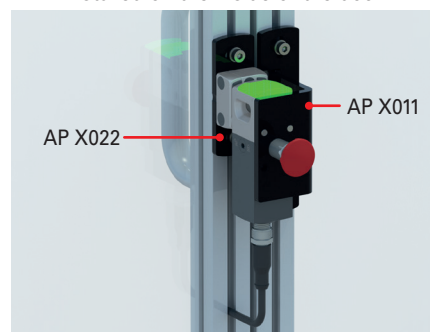
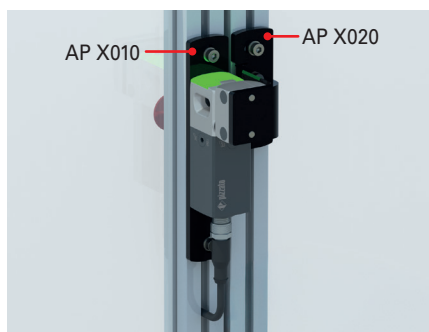
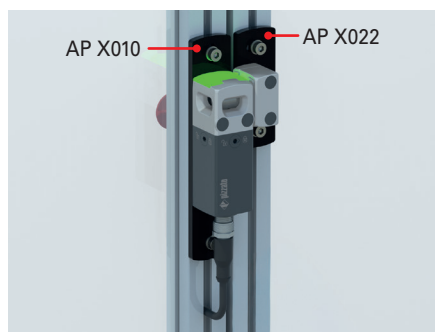


Examples of installation on 40 mm profiles

Sliding doors.










Hinged doors.

Hinged doors, with switch installed on the inside of the door.

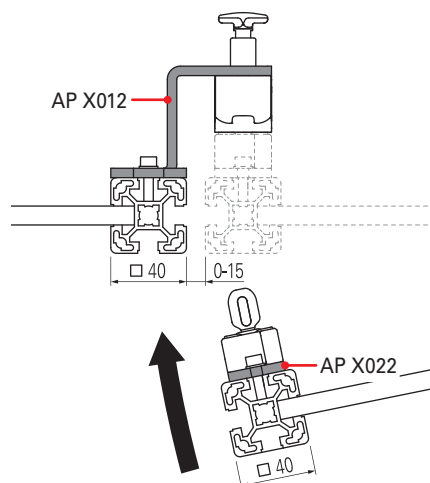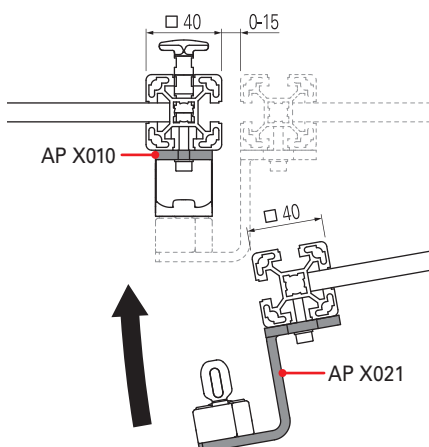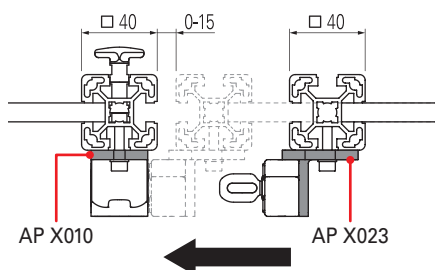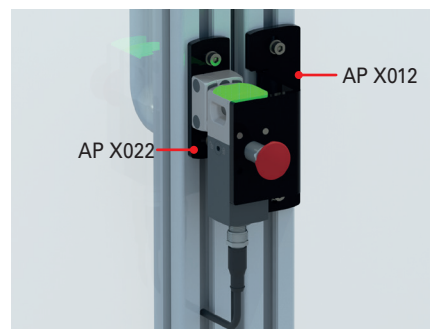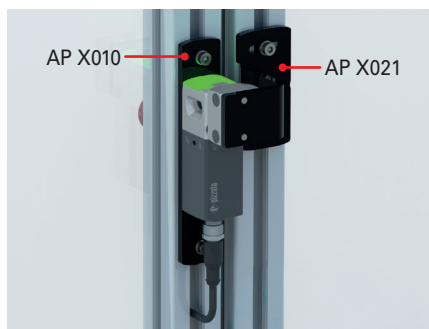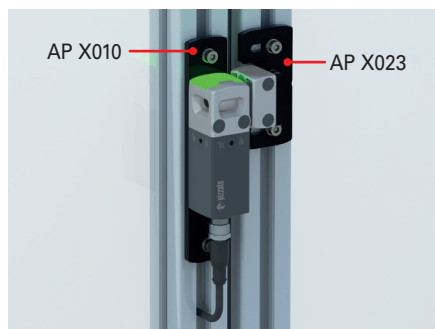




Fixing brackets

AP X010	AP X011	AP X012	AP X013
NX switch plate for hinged-door version with 30 and 40 mm profiles and sliding-door version with 30 and 40 mm profiles	NX switch bracket for internal door-side mounting, hinged-door version, 30 mm profile	NX switch bracket for internal door-side mounting, hinged-door version, 40 mm profile	NX switch plate for hinged-door version with 30 and 40 mm profiles and sliding-door version with 30 and 40 mm profiles, for lock-out device installation
			
			
AP X020	AP X021	AP X022	AP X023
Vertical bracket for NX actuator, hinged-door version, 30 mm profile	Vertical bracket for NX actuator, hinged-door version, 40 mm profile	Plate for NX actuator, sliding-door version, 30 mm profile, or hinged-door version, internal door-side mounting, 30 and 40 mm profile	Bracket for NX actuator, sliding-door version, 40 mm profile
			
			

Extensions for release button


Article	Description	Drawing
VN NX-LP30	Metal extension for release button. For max. wall thickness of 30 mm	
VN NX-LP40	Metal extension for release button. For max. wall thickness of 40 mm	
VN NX-LP50	Metal extension for release button. For max. wall thickness of 50 mm	
VN NX-LP32	Stainless steel extension (AISI 316L) for release button. For max. wall thickness of 30 mm	
VN NX-LP42	Stainless steel extension (AISI 316L) for release button. For max. wall thickness of 40 mm	
VN NX-LP52	Stainless steel extension (AISI 316L) for release button. For max. wall thickness of 50 mm	
VN NX-ERP	Release button in technopolymer, Ø26 mm, red	

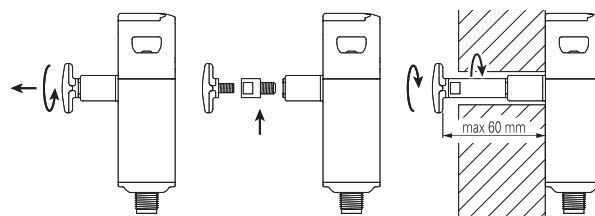

- Metal extensions can be combined with one another to achieve the desired length.
- Do not exceed an overall length of 60 mm between the release button and the switch. Make sure there is enough clearance between the release button and the wall so that it can be safely gripped and manually reset after it has been pressed.
- Use medium-strength thread locker to secure the extensions.


Lock-out device

When the flap is lifted, a Ø 7 mm wide elongated eyelet emerges on the top of the device, allowing insertion of up to 4 padlocks with a shackle diameter of 3.5 mm.

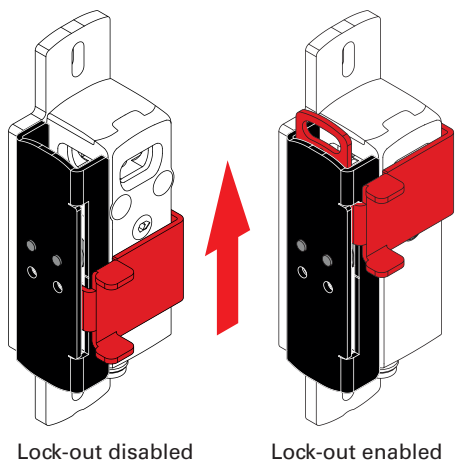

Lock-out disabled

Lock-out enabled

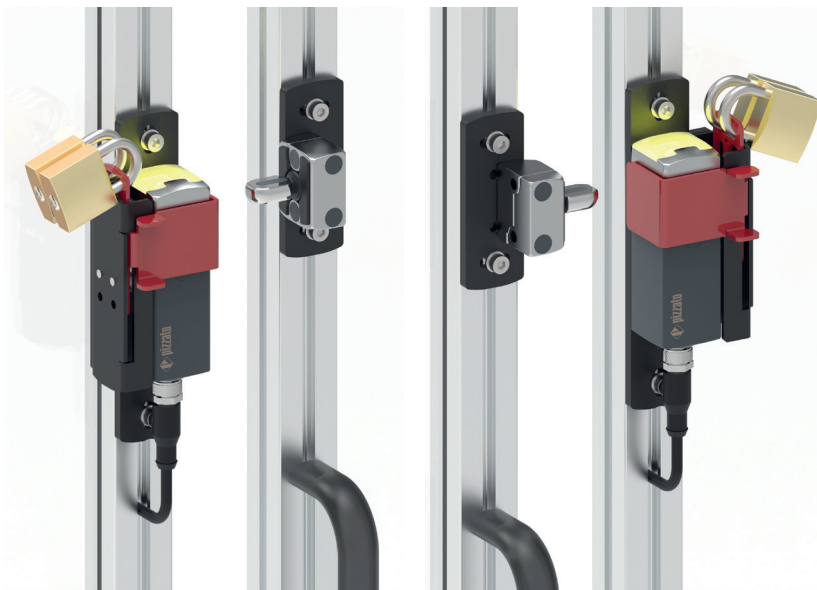

Configuration for guard with hinged or sliding opening - right opening.
LK X1S001

Configuration for guard with hinged or sliding opening - left opening.
LK X1D001

Error-proof operation

To prevent unintentional guard closure, simply move the red flap upwards so that the inputs of the switch are fully covered, preventing insertion of the actuator pin.

Before entering the danger zone, each operator must insert his or her own personal padlock in the lock-out slot. This means that the lock-out device can be unlocked only once all padlocks have been removed; i.e., once all operators have exited the danger zone.




Article	Description	Drawing	
LK X1S000	Lock-out device for guard with hinged or sliding opening - right opening.		
LK X1D000	Lock-out device for guard with hinged or sliding opening - left opening.		
LK X1S001	Lock-out device for guard with hinged or sliding opening - right opening, including rear bracket AP X013		
LK X1D001	Lock-out device for guard with hinged or sliding opening - left opening, including rear bracket AP X013		
AP X013	NX switch plate for installation of lock-out device, compatible with guards with hinged or sliding opening, with 30 or 40 mm profiles.		


NX series RFID safety switches with lock

Dimensional drawings


Device
NX •••AZ•SMK

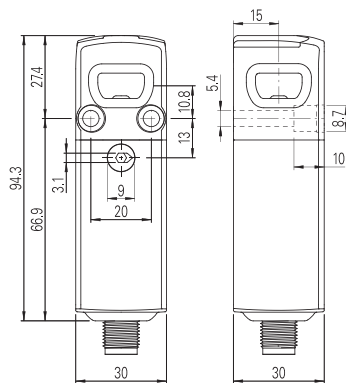


Device
NX •••CZ•SMK

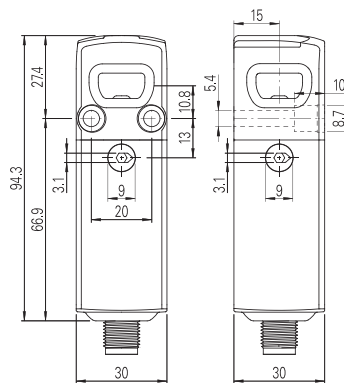


Actuator
VN NX-F••

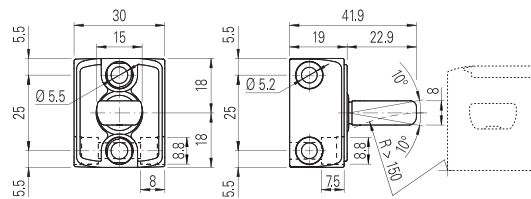


Device
NX •••AE•SMK

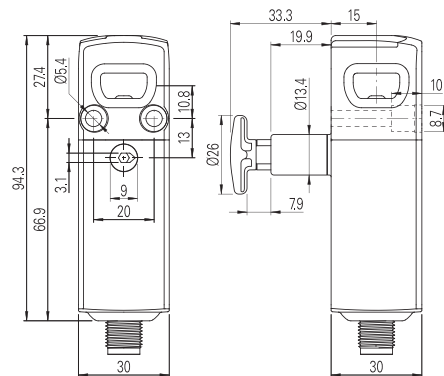

Device
NX •••CE•SMK

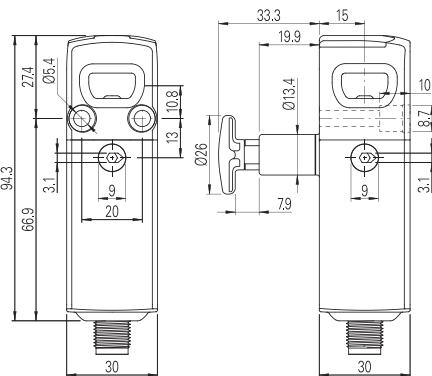


Travel of release button




Output type


M12 connector, axial



With axial cable

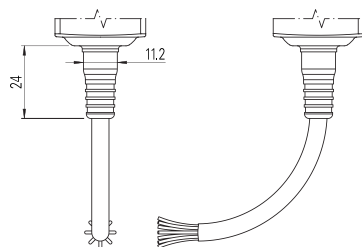


With 0.2 m cable length
and M12 axial connector



[illegible]This image shows a full page of blank graph paper. The grid consists of small, equal-sized squares formed by thin black lines. There are no margins, text, or other markings on the page.




General Catalogue
Detection



General Catalogue
HMI



General Catalogue
Safety
Devices



General Catalogue
- PLCs & Safety
Modules



General Catalogue
Lift



Website
www.pizzato.com



Pizzato Elettrica s.r.l. via Torino, 1 - 36063 Marostica (VI) Italy

Phone: +39 0424 470 930

E-mail: info@pizzato.com

Website: www.pizzato.com

Any information or application example, connection diagrams included, described in this document are to be intended as purely descriptive. The choice and application of the products in conformity with the standards, in order to avoid damage to persons or goods, is the user's responsibility. The drawings and data contained in this document are not binding and we reserve the right, in order to improve the quality of our products, to modify them at any time without prior notice. All rights to the contents of this publication are reserved in accordance with current legislation on the protection of intellectual property. The reproduction, publication, distribution and modification, total or partial, of all or part of the original material contained therein (including, but not limited to, texts, images, graphics), whether on paper or in electronic form, are expressly prohibited without written permission from Pizzato Elettrica Srl. All rights reserved. © 2026 Copyright Pizzato Elettrica

ZE FGL36A26-ENG



8 018851 705601